




# FLEXIBLE PERIMETER TRIMS



Excellent solution for finishing ceilings around columns and convex walls, easily cut and curved by hand on site.


## Perimeter Trims

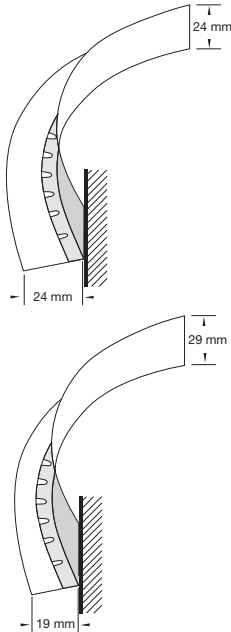

Item Nr.	Dimensions		Content / Carton		Weight / Carton kg	Cartons / Pallet
	length (mm)	height (mm)	pcs	lm		
<b>White</b>						
FT 2424	2500	24	10	25,00	5,50	50
FT 1929	2500	29	10	25,00	5,50	50

<b>Black</b>						
FT 2424 BK	2500	24	10	25,00	5,50	50
FT 1929 BK	2500	29	10	25,00	5,50	50

## Accessory



Item Nr.	Description	Dimensions		Content / Carton pcs	Weight / Carton kg
		length (mm)	height (mm)		
A WDN 23 G	Double bent tee bar hanger	57	36	100	2,30

## Key Attributes

- Optimum length for most columns with a 2.5 m length
- Easy to cut and to bend to necessary radius
- Available in 2 colours (White and Black)
- 3 ply white PVC tape for a better visual
- Quick fix for columns and convex curves




## Physical Data

- **Material**  
Steel core with PVC tape
- **Product Family**  
Perimeter Trims
- **Coating**  
PVC
- **Colour**  
Available in Global White and Black.

# FLEXIBLE PERIMETER TRIMS


## Perimeter Detailing

- 1 The white Flexible trim has **THREE layers** of white PVC coating to avoid the « greyish » visual appearance between the steel supported zone « **G** » and the PVC only zone « **P** ».

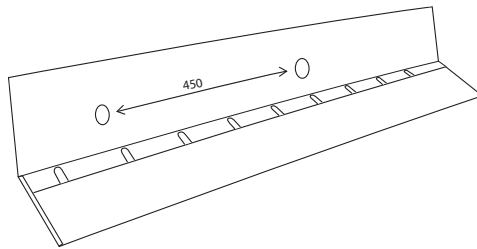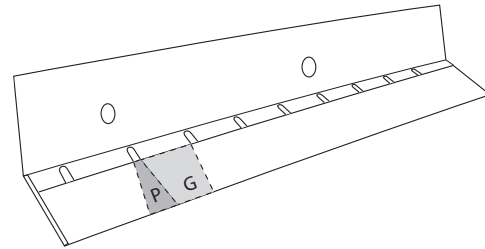


- 2 The Flexible trim should follow the same rule of being fixed onto the wall with 450 mm spacing.

- 3 These trims are considered decorative elements therefore any grid laying on them will need :

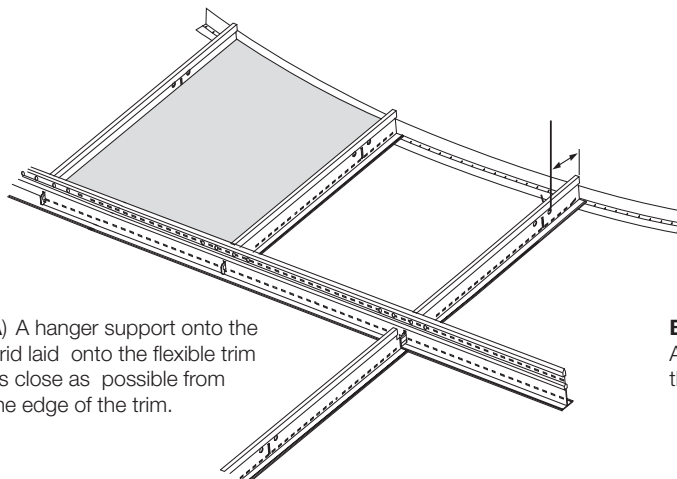

**A)** A hanger support onto the grid laid onto the flexible trim as close as possible from the edge of the trim.

**B)** Use the accessory A WDN 23 G to support the load above the trim.

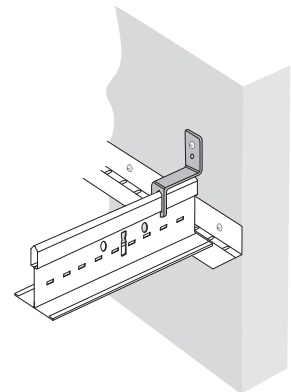

### Note:

These trims can be used only in curved TOE OUT ( Convex ) installations (19 x 29 section must be installed with the 29 mm face vertical).

Minimum bending radius : 200 mm.

Minimum environment temperature during the curving operation : 20°C.

Due to the nature of the PVC coating, these trims do not match exactly our standard black & white colour and gloss.

Fire reaction classification Euroclass F (EN 13501-1) - please check local/country regulations for compliance.

Availability of products may vary according to location.  
Please contact our **Armstrong Technical Sales** for further details.

### CENTRAL EUROPE NORTH (DK/EE/FIN/IS/LT/LV/N/PL/S)

Armstrong Building Products B.V.  
Sp. z o.o. Oddział w Polsce  
Ul. Domaniewska 37  
02-672 Warszawa  
Poland

Tel. : (+48) 22 337 86 10 / 86 11

Fax : (+48) 22 337 86 12

e-mail : service-ce@armstrong.com

Latvia : [www.armstrong.lv](http://www.armstrong.lv)

Lithuania : [www.armstrong.lt](http://www.armstrong.lt)

Norway : [www.armstrong.no](http://www.armstrong.no)

Poland : [www.armstrong.pl](http://www.armstrong.pl)

Sweden : [www.armstrong.se](http://www.armstrong.se)