

METAL LEAFLET HOOK-ON

B-H 300 SYSTEM	02
-----------------------	----

F-H 600 SYSTEM	09
-----------------------	----

K-H 400 SYSTEM	16
-----------------------	----

R-H 200 SYSTEM	23
-----------------------	----

R-H 215 SYSTEM	30
-----------------------	----

Metal
product

B-H 300 SYSTEM

Linear grid

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS



BENEFITS

- Combining functionality with stylish simplicity
- Creates a linear visual effect
- C-profiles alignment with partitions to help fixing/support for partitions.
- Remarkably versatile
- Various design options for the profile and panel (linear, radial, crossed)
- Easy access to the ceiling void

APPLICATION AREA

- Used in large office environments and flexible with partitioning systems...

PROJECT: Palazzo Uffici, Milano (IT) :..... ARCHITECT: Genius Loci Architettura s.r.l

B-H 300 SYSTEM

LINEAR GRID

SPECIFICATION


System	Armstrong ceiling system B-H 300, Hook-On solution with visible grid, with optional swing-down "Window» function, suspension height min. 100 mm
Panel Material	galvanised steel sheet panel width up to 400 mm 0.6 mm panel width from 401 mm 0.7 mm (aluminium or further materials on request)
Coating	RAL 9010 pure white post-coated powder painted visible surface, other RAL or NCS colours on request
Execution*	rectangular panel square edged long sides CA / DA (30 - 55 mm) short sides E1 / F1 (30 mm)
Gap solution	3 mm gap, with black gasket one long and short side
Acoustic inlay	Black non-woven acoustic fleece as standard. Other options available on request.
Configurable dimensions	panel length (A) 600 - 3000 mm panel width (B) 275 - 1350 mm
Grid system	GemaGrid® system in combination with visible C-profile 100 mm Further suspension methods on request
Perimeter solution	Range of standards trims in steel and aluminium plus custom bulkheads available

* For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet


Service integration	standard round or rectangular cut-outs plus customised options on request
Special capabilities	- trapezoidal panel solution - curved panel solution - chilled ceiling solution - can be combined with other Armstrong products




STANDARD PERFORATION PATTERNS




Ultra Microperforation Rg 0501
Hole diameter: 0.5 mm
Free area: 0.64 %



Extra Microperforation Rg 0701
Hole diameter: 0.7 mm
Free area: 1.5 %



Microperforation Rd 1522
Hole diameter: 1.5 mm
Open area: 22%



Standard Perforation Rg 2516
Hole diameter: 2.5 mm
Open area: 16%

Other perforation patterns available on request.

ACOUSTIC PERFORMANCE

Metal ceiling systems have been tested for their acoustic performance in terms of sound absorption, sound attenuation and sound reduction. These performance values will depend upon the perforation and the acoustic infill. Please contact us for more information on the available factory fitted acoustic options.

THERMAL CONDUCTIVITY

(λ) W/mK
50.0 : Steel
0.04 : Acoustic fleece

HUMIDITY EXPOSURE

Up to 95% RH (for short term exposure).

SERVICES INTEGRATION

Metal panels can be supplied with factory produced cut outs and apertures for the integration of building services equipment.

CLEANING

Dust should be removed from the painted surface by wiping with a clean soft cloth. More stubborn marks should be removed with a mild household detergent in warm water. Excessive use of water should be avoided. The use of abrasive cleaners of the painted surface is not recommended.

COLOUR

Standard colours

RAL 9010	20% gloss
Global White	12% gloss
RAL 9006	30% gloss
RAL 9007	30% gloss



Special colours

Other RAL and NCS colours available on request


QUALITY STANDARD

Armstrong is a certified **EN ISO 9001:2008** Quality Assured Manufacturer. All Armstrong ceiling and grid systems are manufactured to the relevant tolerances and quality standards appropriate to material. Where differences exist between this and any expressed or implied architectural specifications of requirements then Armstrong's manufacturing standards will prevail unless stated otherwise.


ENVIRONMENTAL

Our metal panels have an average of up to 30% recycling content. Our European manufacturing plants are certified to: **ISO 14001:2004 + Cor. 1:2009**
Armstrong is a member of TAIM (Technical Association of Industrial Metal Ceilings).



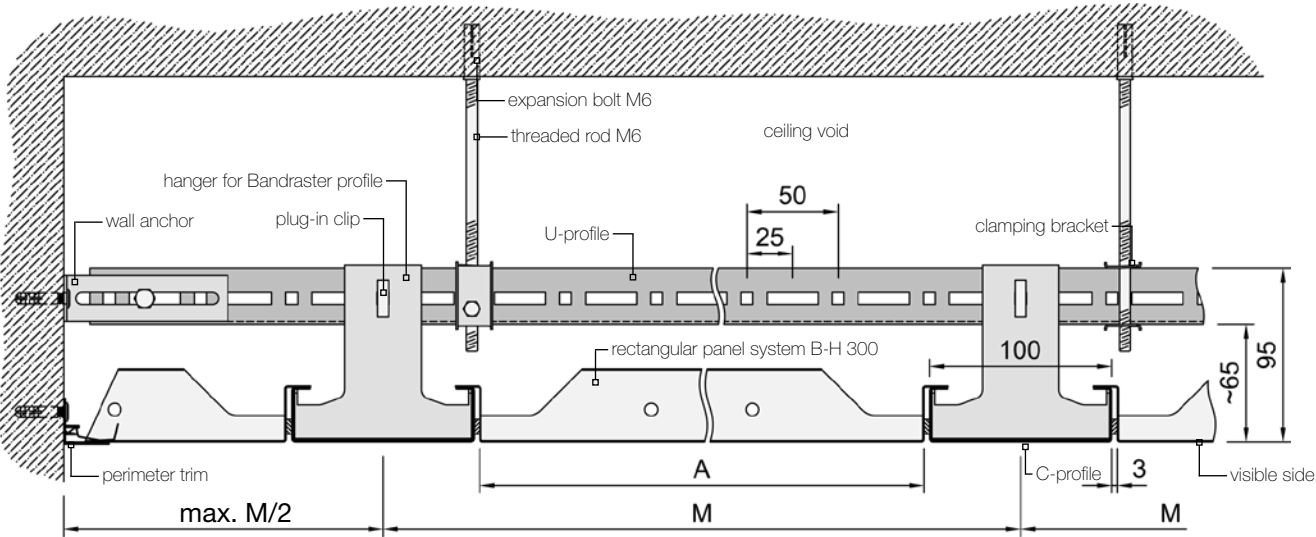

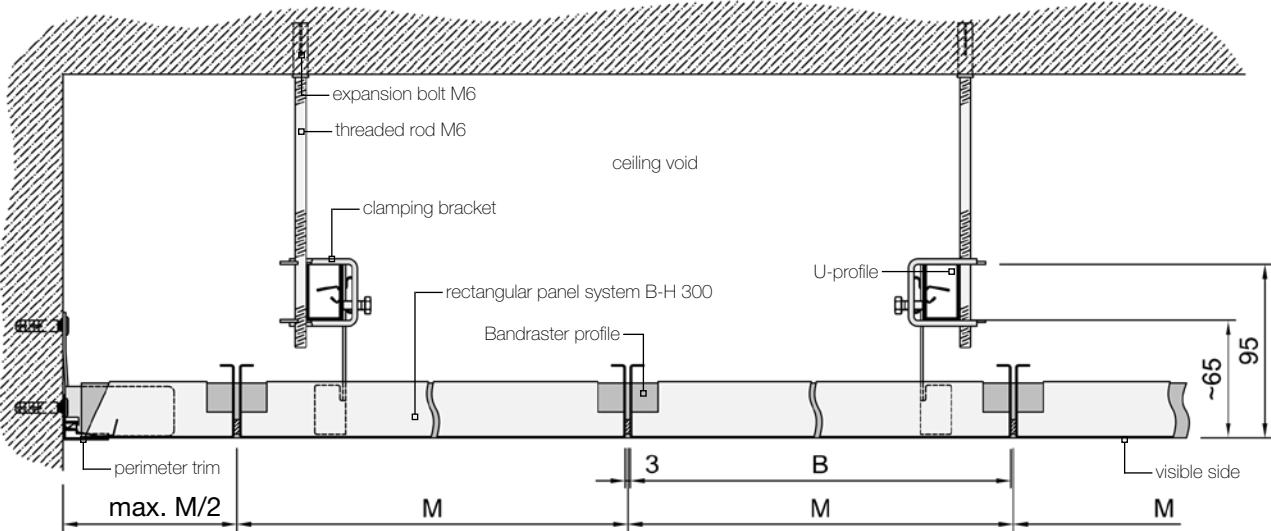



CROSS-SECTION



LONGITUDINAL-SECTION



M = module size / A = panel length / B = panel width

	Sustainability		Acoustics					Safe & Healthy				
	 ISO 14021											
	Recycled content (%)	Light reflectance (%)	α _w up to	Sound absorption class	NRC up to	Dncw / Dnfw (dB) up to	Rw (dB) up to	Fire reaction	Humidity Resistance (%) up to	Cleanability	Bioguard paint option	Scratch resistance
Ultra Microperforation Rg 0501 (1)	up to 30	83	0.45(LM)	D	0.55	18	8	A1	95	scrubbable	✓	✓
Extra Microperforation Rg 0701 (2)	up to 30	80	0.55(L)	D	0.65	21	10	A2-s2, d0	95	wipeable moist cloth (3)	✓	✓
Microperforation Rd 1522 (2)	up to 30	65	0.70	C	0.70	16	6	A2-s2, d0	95	wipeable moist cloth (3)		✓
Standard Perforation Rg 2516 (2)	up to 30	70	0.75(L)	C	0.80	18	8	A2-s2, d0	95	wipeable moist cloth (3)		✓
Plain / Unperforated (1)	up to 30	85	0.10(L)	Not Classified	0.10	44	19	A1	95	scrubbable	✓	✓
Premium B15	up to 30	depends on perforation	0.65	C	0.60	41	20	A2-s1, d0	95	wipeable moist cloth		✓
Premium OP19	up to 30	depends on perforation	1.00	A	0.90	31	15	A2-s2, d0	95	wipeable moist cloth		✓


(1) RAL 9010 colour, without acoustic inlay. (2) RAL 9010 colour, with black acoustic fleece glued on rear. (3) Wipeable moist cloth for perforated tiles with fleece. Scrubbable for plain tiles or perforated tiles without fleece.

Item No.	Designation
BPM 300100	U-profile
BPM 300119	connector for U-profile
BPM 300120	plug-in clip
BPM 300140	wall anchor
BPM 300121	clamping bracket
BPM 311111	expansion bolt M6 x 30 mm
BPM 311099	threaded rod M6 x 1'000 mm
BPM 215500	C-profile 100 mm




Item No.	Designation
BPM 311067	connector for C-profile
BPM 300118	hanger for C-profile
BPM 300144	wall anchor for C-profile
BPM 311205	partition holder for C-profile
BPM 311303	hexagonal bolt M6 x 16 mm
BPM 311103	hexagonal nut M6
BPM 311305	washer M6 18 x 1.6 mm

Detail A B-H 300 panel

For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet

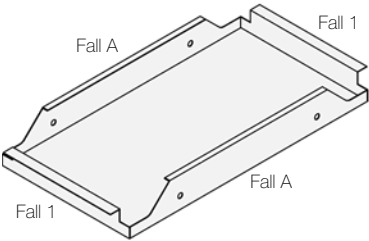


Detail B grid system

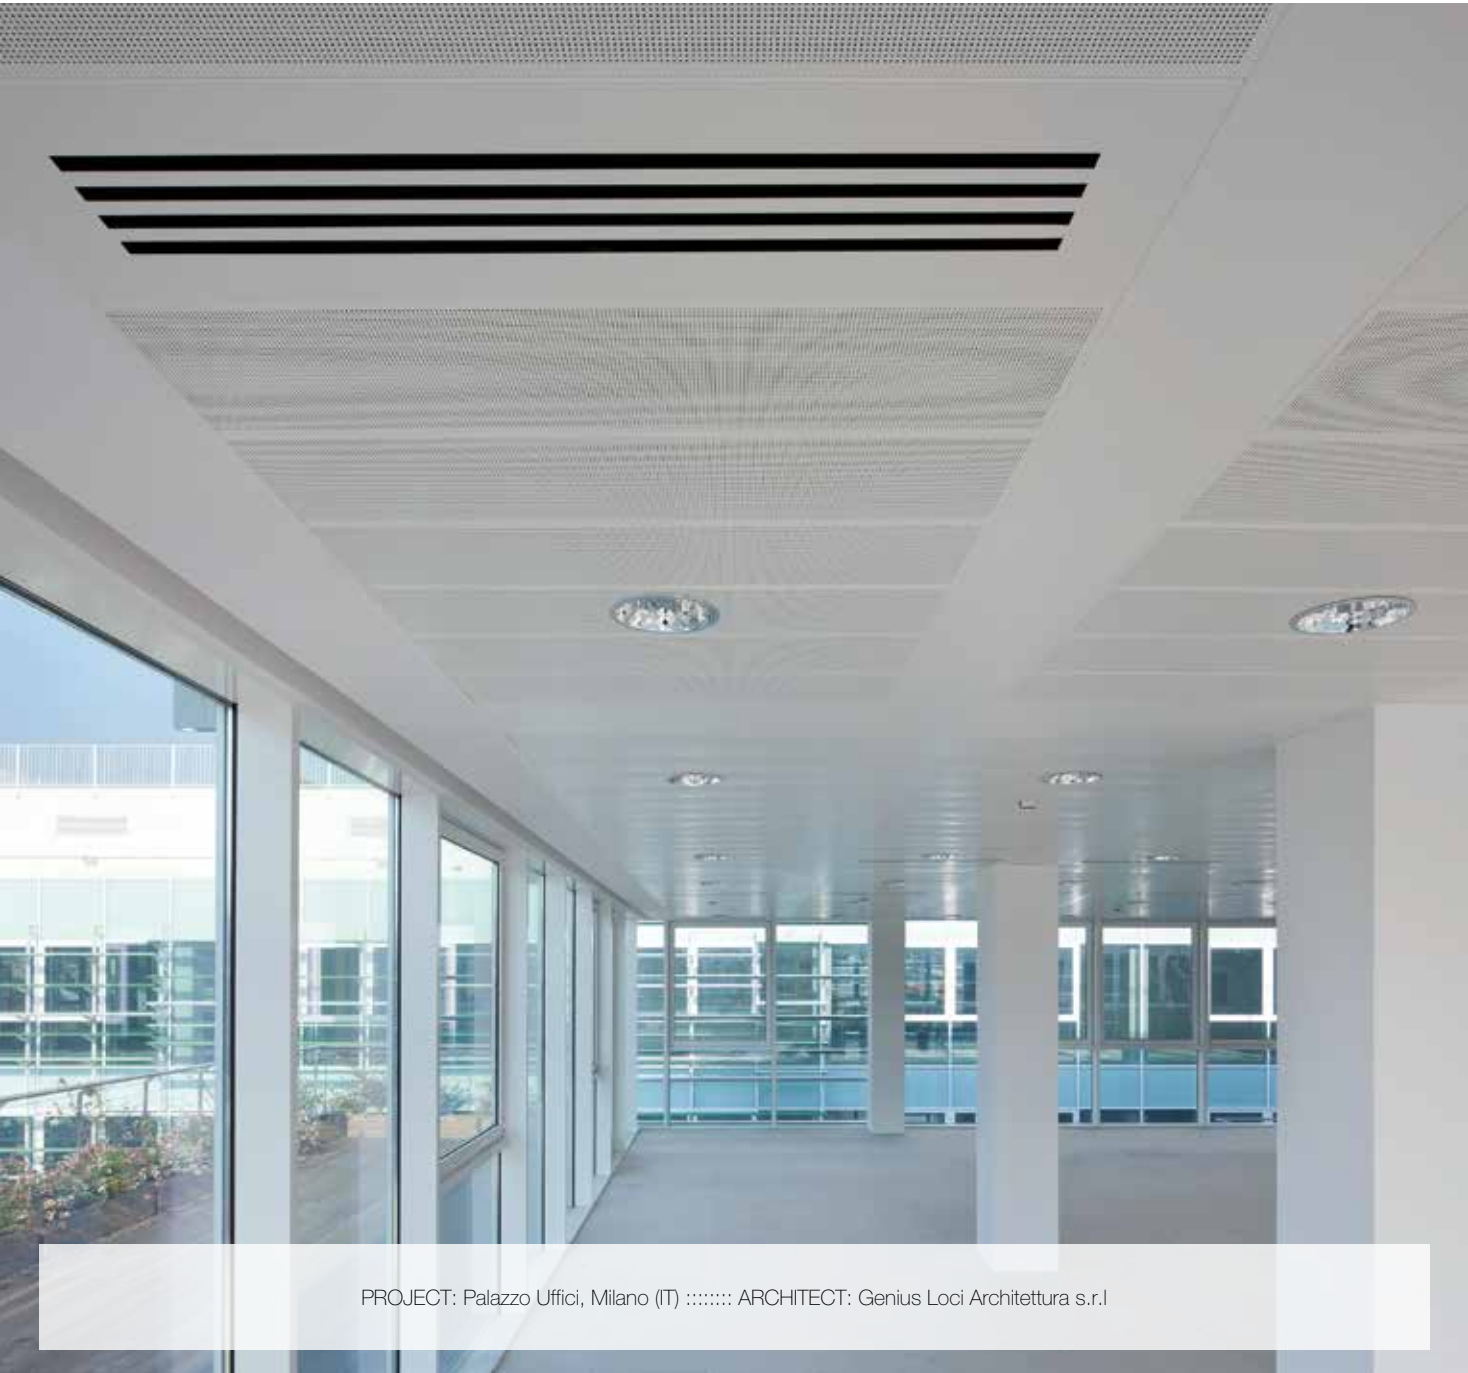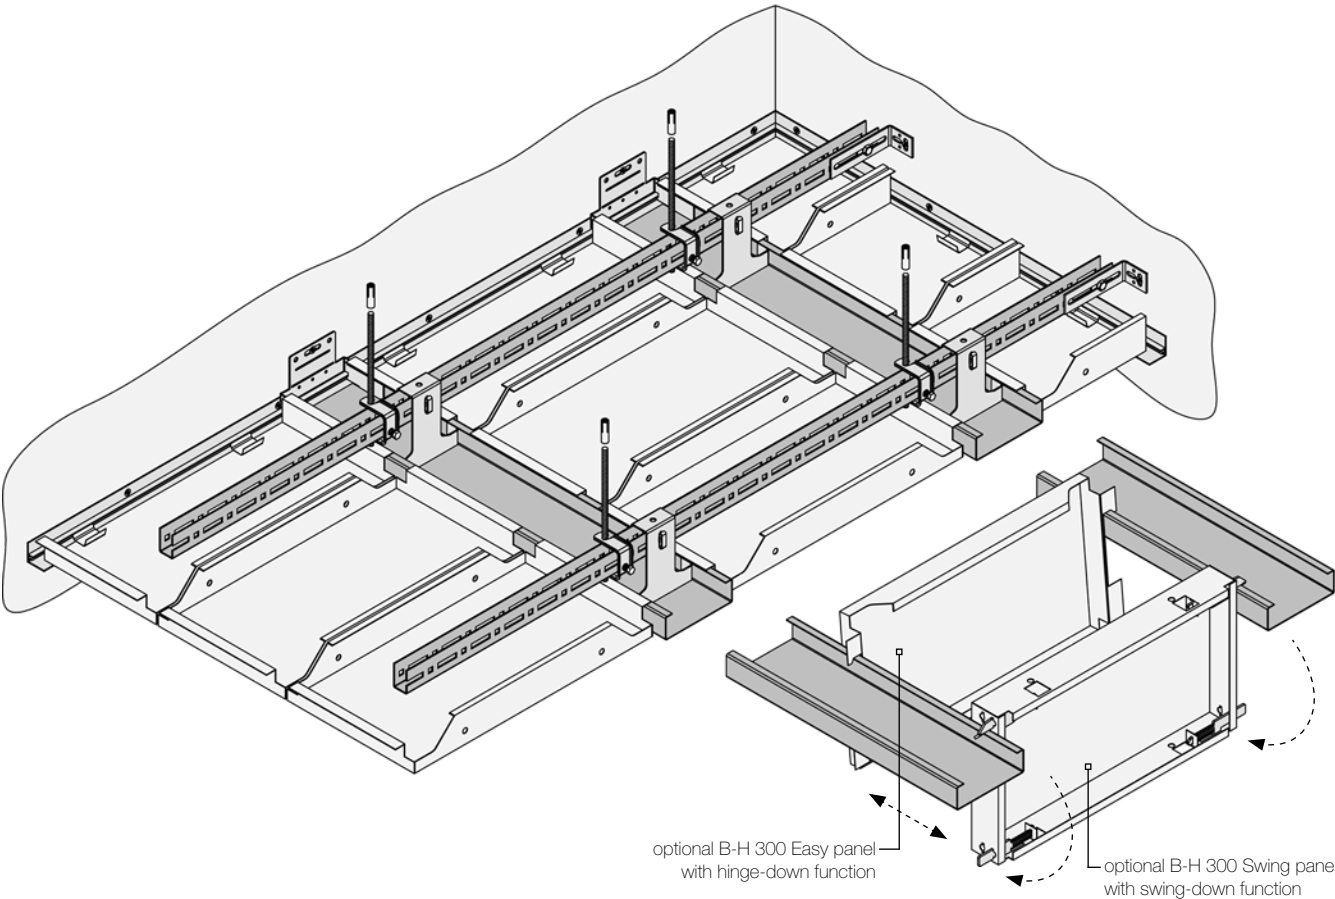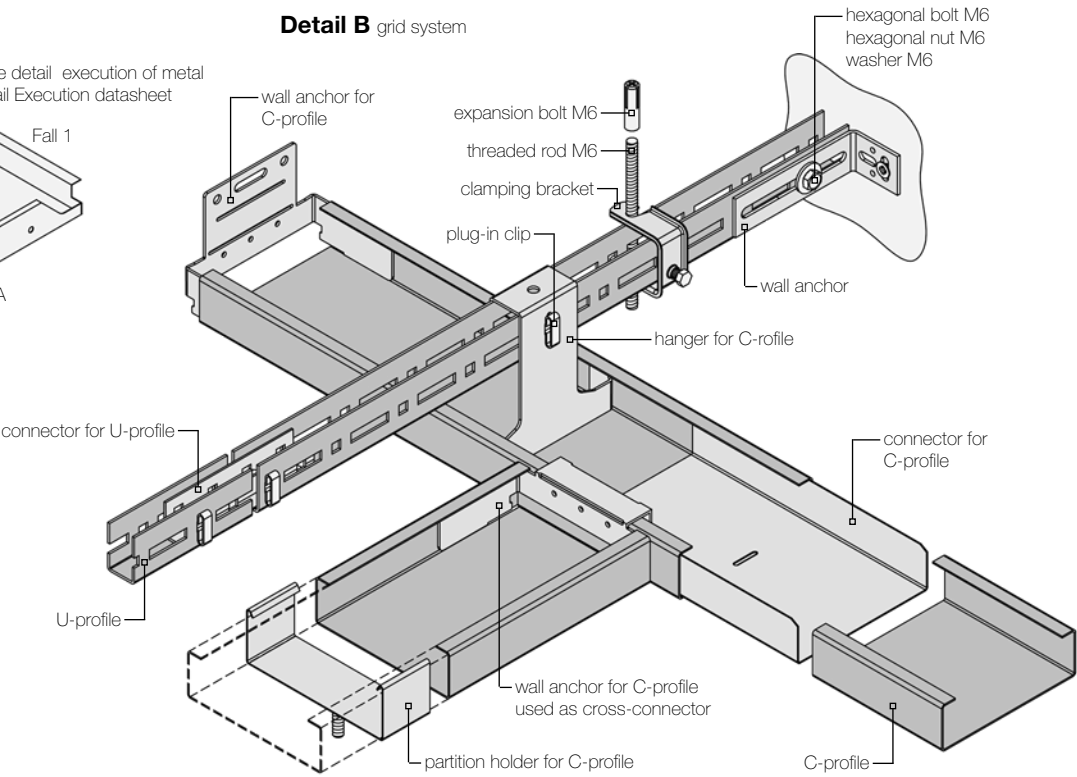


PROJECT: Palazzo Uffici, Milano (IT) ::::: ARCHITECT: Genius Loci Architettura s.r.l

Detail C suspension methods

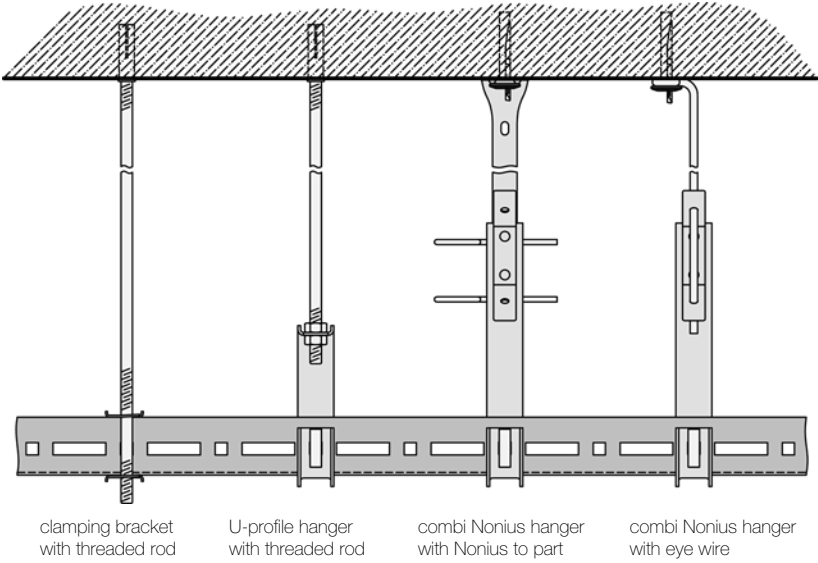

Metal
product



F-H 600 SYSTEM

Corridor ceiling

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS



BENEFITS

- Free-span solution
- Rectangular panel, adapted to corridor or circulation area width
- Meets visual and individual project requirements

- Easy, quick access to ceiling void due to the swing-down function
- Perimeter trim is not part of the standard solution. It's available as an option

APPLICATION AREA

- Corridors where the panels simply span between walls.

PROJECT: Terna, Roma (IT) ::::: ARCHITECT: Gabriele Napolitano, S&PA

F-H 600 SYSTEM

CORRIDOR CEILINGS

SPECIFICATION


System	F-H 600 System Armstrong ceiling system F-H 600, Hook-On solution with concealed grid, installation height min. 170 mm for wall bracket at perimeter with 5 - 65 mm shadow gap between wall and panel F-H 600 Swing Function Armstrong ceiling system F-H 600 Swing-down, Hook-On solution with visible grid, installation height min. 155 mm for wall bracket at perimeter with 0 - 72 mm shadow gap between wall and profile with integrated swing-down function
Panel material	Galvinised steel sheet panel width up to 400 mm 0.6 mm panel width from 401 mm 0.7 mm (aluminium or other materials on request)
Coating	RAL 9010 pure white post-coated powder painted visible surface, other RAL or NCS colours on request
Execution*	F-H 600 System Rectangular panel square edged Long sides CA / DA (30 - 55 mm) Short sides E4 / F4A (30 mm) with standard notching F-H 600 Swing Function Rectangular panel square edged Long sides CA / DA (45 - 55 mm) Short sides E2 / F2 (40 mm) with standard notching
Acoustic inlay	Black non-woven acoustic fleece as standard. Other options available on request.

Gap solution	F-H 600 System 0 mm gap on long side, without gasket Variable shadowgap on short side to cover wall tolerances F-H 600 Swing Function 3 mm gap, with black gasket on one long and two short sides
Configurable dimensions	F-H 600 System Panel length 600 - 3000 mm Panel width 275 - 1350 mm F-H 600 Swing Function Panel length 600 - 3000 mm Panel width 247 - 750 mm
Grid system	F-H 600 System Wall bracket attached to the wall in combination with J-bar, optional perimeter trim to cover the gap F-H 600 Swing Function Wall bracket attached to the wall in combination with G-profile
Service integration	Standard round or rectangular cut-outs according to customer needs


* For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet




STANDARD PERFORATION PATTERNS



Extra Microperforation Rg 0701
Hole diameter: 0.7 mm
Open area: 1.5 %



Microperforation Rd 1522
Hole diameter: 1.5 mm
Open area: 22%



Standard Perforation Rg 2516
Hole diameter: 2.5 mm
Open area: 16%

Other perforation patterns available on request.

ACOUSTIC PERFORMANCE

Metal ceiling systems have been tested for their acoustic performance in terms of sound absorption, sound attenuation and sound reduction. These performance values will depend upon the perforation and the acoustic infill. Please contact us for more information on the available factory fitted acoustic options.

THERMAL CONDUCTIVITY

(λ) W/mK
50.0 : Steel
0.04 : Acoustic fleece

HUMIDITY EXPOSURE

Up to 95% RH (for short term exposure).

SERVICES INTEGRATION

Metal panels can be supplied with factory produced cut outs and apertures for the integration of building services equipment.

CLEANING

Dust should be removed from the painted surface by wiping with a clean soft cloth. More stubborn marks should be removed with a mild household detergent in warm water. Excessive use of water should be avoided. The use of abrasive cleaners of the painted surface is not recommended.

COLOUR

Standard colours

RAL 9010	20% gloss
Global White	12% gloss
RAL 9006	30% gloss
RAL 9007	30% gloss



Special colours

Other RAL and NCS colours available on request

QUALITY STANDARD

Armstrong is a certified **EN ISO 9001:2008** Quality Assured Manufacturer. All Armstrong ceiling and grid systems are manufactured to the relevant tolerances and quality standards appropriate to material. Where differences exist between this and any expressed or implied architectural specifications or requirements then Armstrong's manufacturing standards will prevail unless stated otherwise.


ENVIRONMENTAL

Our metal panels have an average of up to 30% recycled content. Our European manufacturing plants are certified to: **ISO 14001:2004 + Cor. 1:2009**
Armstrong is a member of TAIM (Technical Association of Industrial Metal Ceilings).

Sustainability			Acoustics					Safe & Healthy				
Recycled content (%)	Light reflectance (%)	α _w up to	Sound absorption class	NRC up to	Dncw / Dnfw (dB) up to	Rw (dB) up to	Fire reaction	Humidity resistance (%) up to	Cleanability	Bioguard paint option	Scratch resistance	
Extra Microperforation Rg 0701 (2)	up to 30	80	0.55(L)	D	0.65	21	10	A2-s2, d0	95	wipeable moist cloth (3)	✓	✓
Microperforation Rd 1522 (2)	up to 30	65	0.70	C	0.70	16	6	A2-s2, d0	95	wipeable moist cloth (3)		✓
Standard Perforation Rg 2516 (2)	up to 30	70	0.75(L)	C	0.80	18	8	A2-s2, d0	95	wipeable moist cloth (3)		✓
Plain / Unperforated (1)	up to 30	85	0.10(L)	Not Classified	0.10	44	19	A1	95	scrubbable	✓	✓


(1) RAL 9010 colour, without acoustic inlay. (2) RAL 9010 colour, with black acoustic fleece glued on rear. (3) Wipeable moist cloth for perforated tiles with fleece. Scrubbable for plain tiles or perforated tiles without fleece.

CROSS-SECTION - F-H 600

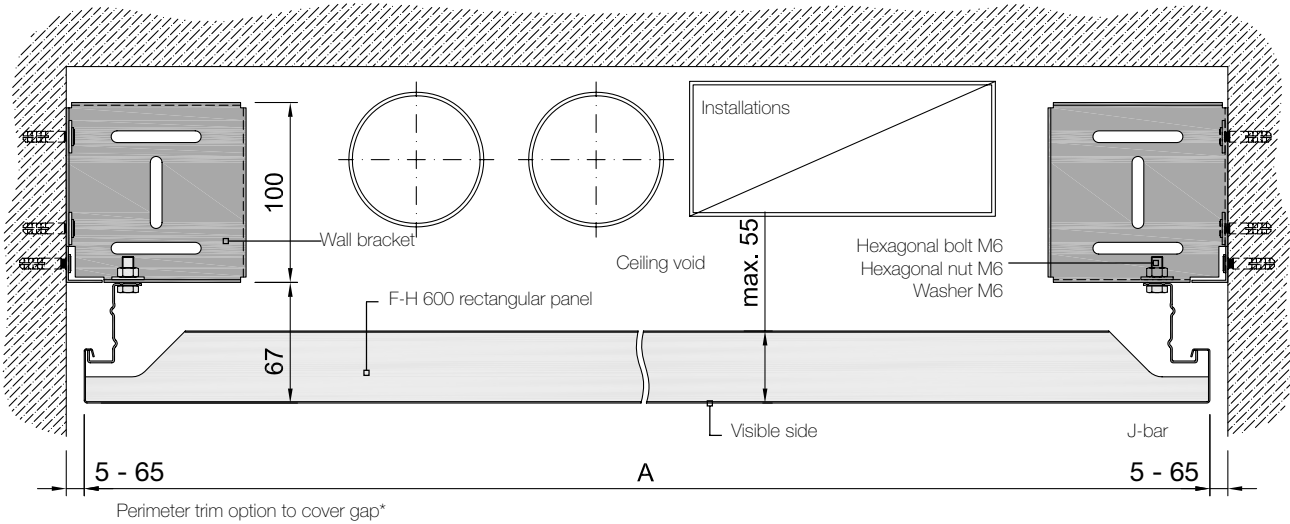

*Wall bracket can be swept and installed without perimeter trim, for a gap of 0 - 90 mm


LONGITUDINAL-SECTION

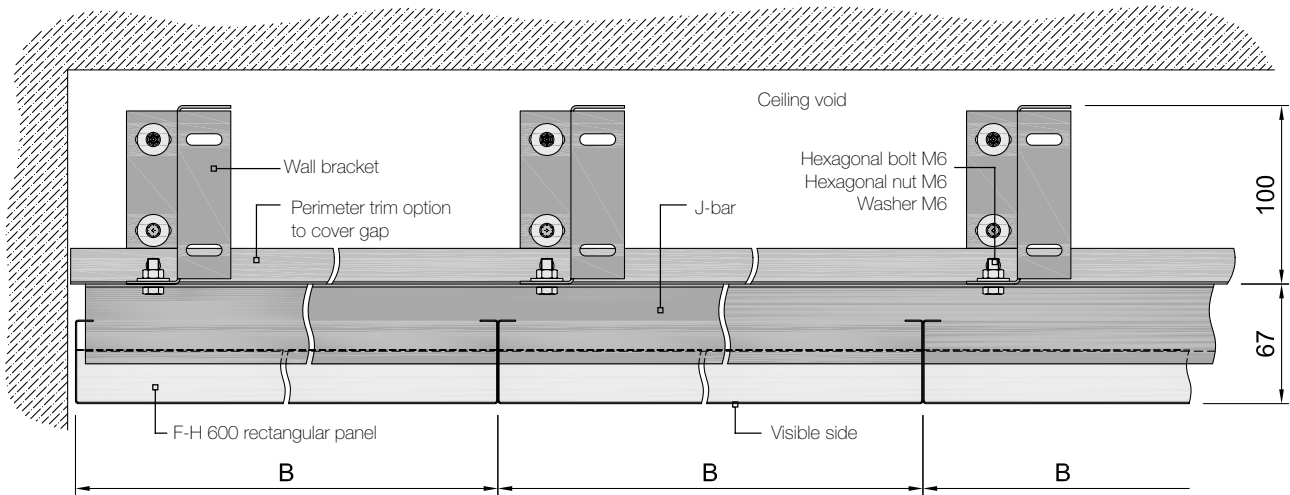



Item No.	Designation
BPM 311007	Wall bracket
BPM 300026	J-bar
BPM 300343	Connector for J-bar
BPM 311303	Hexagonal bolt M6 x 16 mm
BPM 311103	Hexagonal nut M6
BPM 311305	Washer M6 18 x 1.6 mm

F-H 600 SYSTEM

Detail A F-H 600 rectangular panel

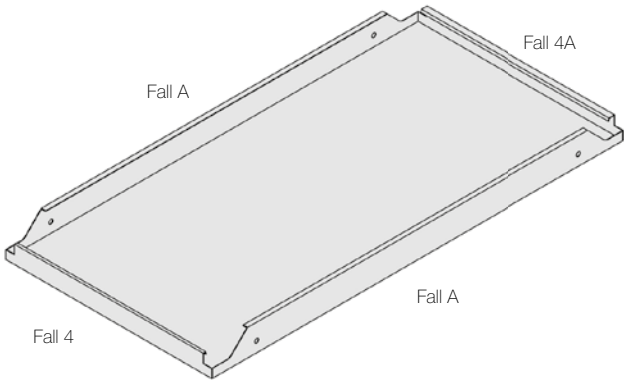


Detail B Grid system


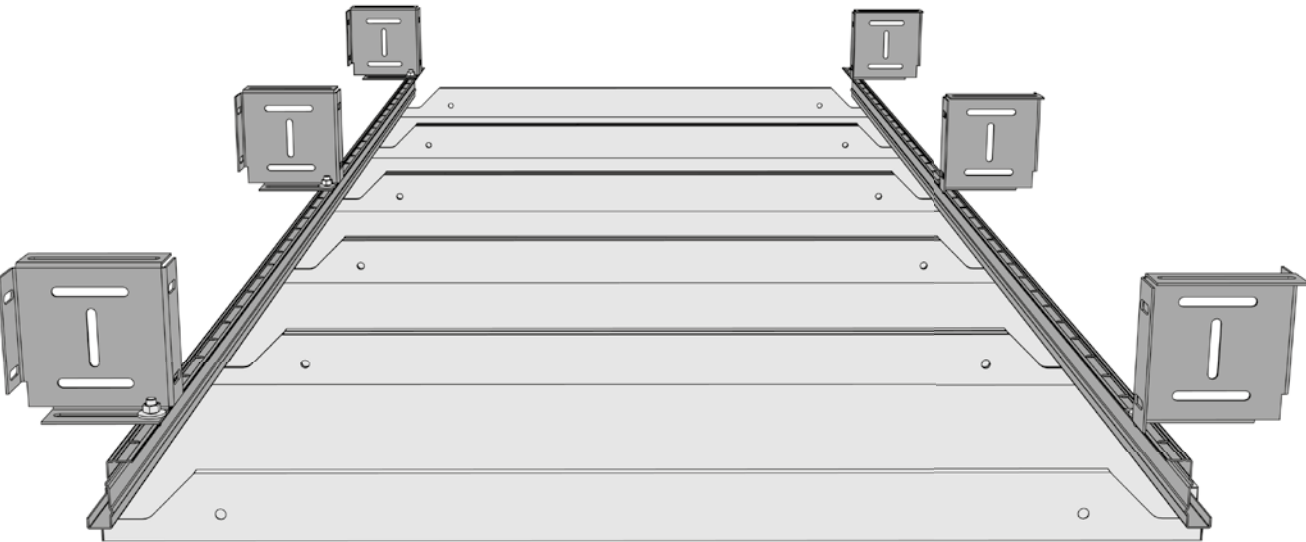
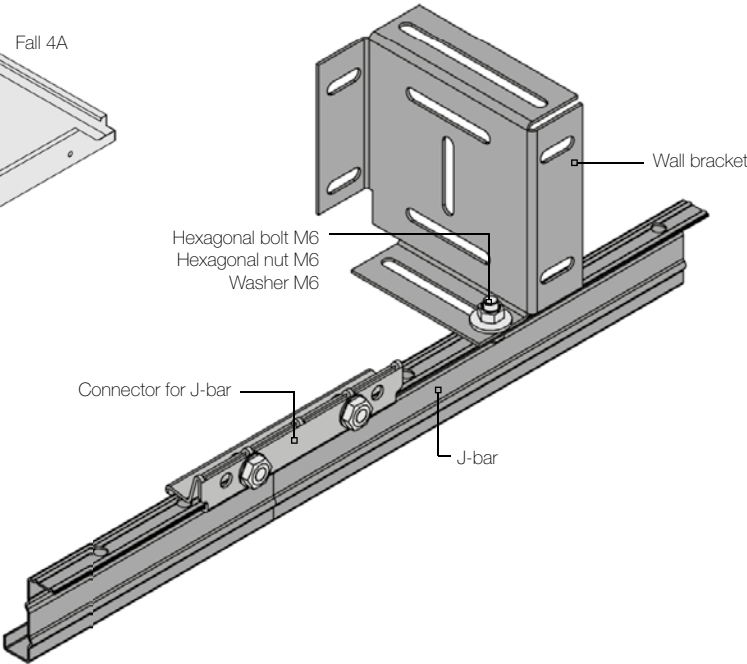


F-H 600 SWING FUNCTION

Detail A F-H 600 rectangular panel

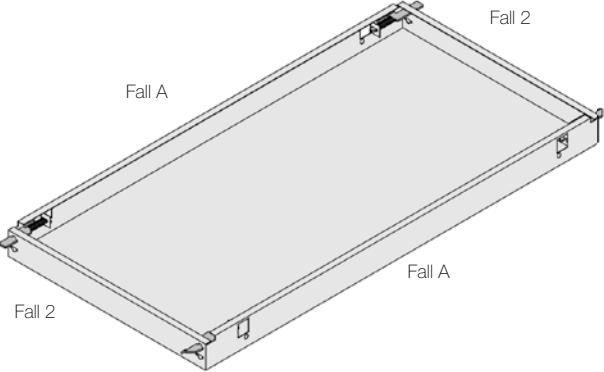

Detail B Grid system

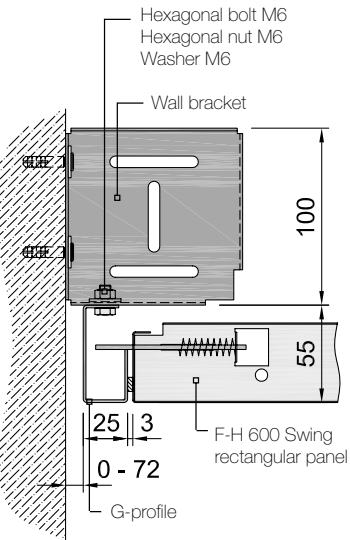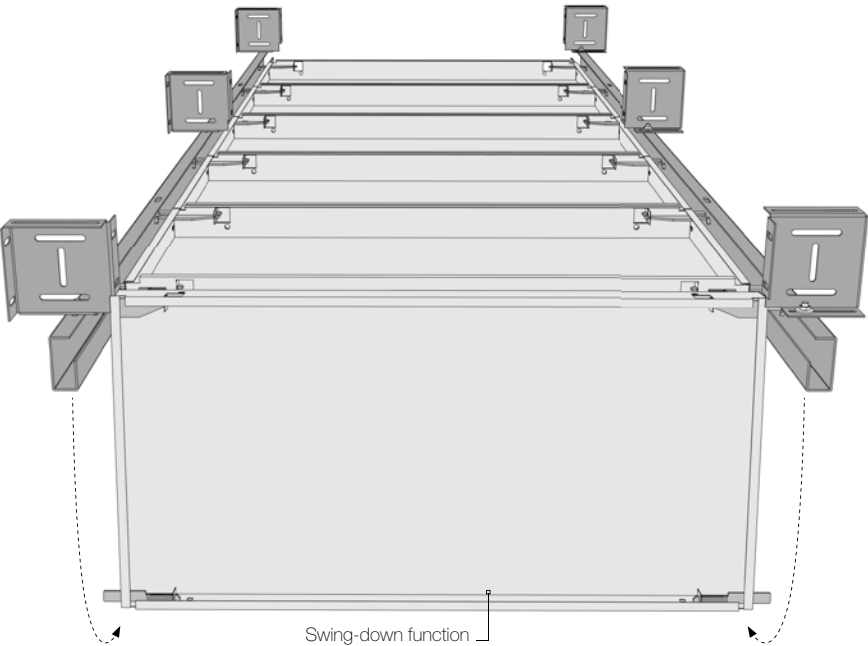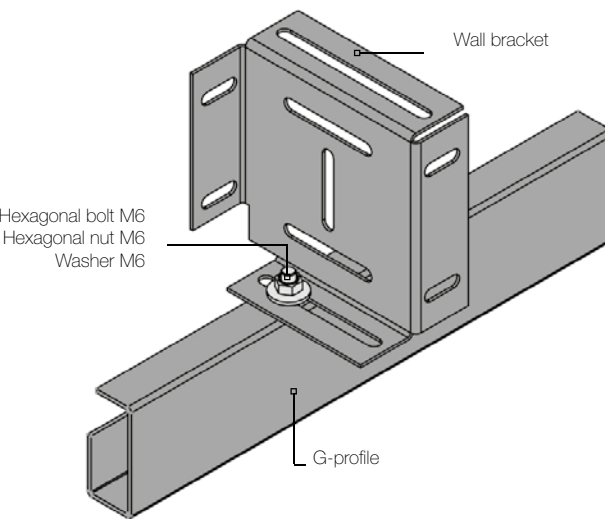

Item No.	Designation
BPM 311007	Wall bracket
BPM 300171	G-profile
BPM 311303	Hexagonal bolt M6 x 16 mm
BPM 311103	Hexagonal nut M6
BPM 311305	Washer M6 18 x 1.6 mm



Metal
product

K-H 400 SYSTEM

Tartan grid

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS



K-H 400 SYSTEM TARTAN GRID

SPECIFICATION

System	Armstrong ceiling system K-H 400, Hook-On solution with visible grid, with optional hinge-down "Easy" function with optional swing-down "Swing" function suspension height min. 85 mm
Panel material	galvanised steel sheet panel width up to 400 mm 0.6 mm panel width from 401 mm 0.7 mm (aluminium or other materials on request)
Coating	RAL 9010 pure white post-coated powder painted visible surface, other RAL or NCS colours on request
Execution*	rectangular panel square edged long sides CA / DA (30 - 55 mm) short sides E1 / F1 (30 mm)
Gap solution	3 mm gap, with black gasket on long and short side
Acoustic inlay	Black non-woven acoustic fleece as standard. Other options available on request.
Configurable dimensions	panel length (A) 600 - 3000 mm panel width (B) 275 - 1350 mm (panel width for Swing option 247 - 750 mm)
Grid system	crossing-box 100 x 100 mm with customised trim-strips 100 mm width
Perimeter solution	range of standards trims in steel and aluminium plus custom bulkheads available

* For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet

Service integration	standard round or rectangular cut-outs plus customised options on request.
Special capabilities	- triangular panel solution - truncated pyramid solution - chilled ceiling solution - can be combined with other Armstrong products



BENEFITS


- Solution for square and/or rectangular room partitioning
- Easily installed and removed
- Grid can be emphasised by using contrasting colours

APPLICATION AREA


- C-profiles can connect to the partition systems to integrate lighting systems efficiently
- Decorative solutions achieved through a variety of panel design options (square mega panel, rectangular, triangular)
- Ideal for breaking up large spaces.

PROJECT: International Book Club - City Madrid (SP) : ARCHITECT: Stitzman Staiff, David S.


STANDARD PERFORATION PATTERNS



**Extra Microperforation
Rg 0701**
Hole diameter: 0.7 mm
Open area: 1.5 %



**Microperforation
Rd 1522**
Hole diameter: 1.5 mm
Open area: 22%



**Standard Perforation
Rg 2516**
Hole diameter: 2.5 mm
Open area: 16%

Other perforation patterns available on request.

ACOUSTIC PERFORMANCE

Metal ceiling systems have been tested for their acoustic performance in terms of sound absorption, sound attenuation and sound reduction. These performance values will depend upon the perforation and the acoustic infill. Please contact us for more information on the available factory fitted acoustic options.

THERMAL CONDUCTIVITY

(λ) W/mK
50.0 : Steel
0.04 : Acoustic fleece

HUMIDITY EXPOSURE

Up to 95% RH (for short term exposure).

SERVICES INTEGRATION

Metal panels can be supplied with factory produced cut outs and apertures for the integration of building services equipment.

CLEANING

Dust should be removed from the painted surface by wiping with a clean soft cloth. More stubborn marks should be removed with a mild household detergent in warm water. Excessive use of water should be avoided. The use of abrasive cleaners of the painted surface is not recommended.

COLOUR

Standard colours

RAL 9010	20% gloss
Global White	12% gloss
RAL 9006	30% gloss
RAL 9007	30% gloss



Special colours

Other RAL and NCS colours available on request

QUALITY STANDARD

Armstrong is a certified **EN ISO 9001:2008** Quality Assured Manufacturer. All Armstrong ceiling and grid systems are manufactured to the relevant tolerances and quality standards appropriate to material. Where differences exist between this and any expressed or implied architectural specifications or requirements then Armstrong's manufacturing standards will prevail unless stated otherwise.


ENVIRONMENTAL

Our metal panels have an average of up to 30% recycled content. Our European manufacturing plants are certified to: **ISO 14001:2004 + Cor. 1:2009**
Armstrong is a member of TAIM (Technical Association of Industrial Metal Ceilings).


Sustainability		Acoustics						Safe & Healthy				
Recycled content (%)	Light reflectance (%)	α _w up to	Sound absorption class	NRC up to	Dncw / Dnfw (dB) up to	Rw (dB) up to	Fire reaction	Humidity resistance (%) up to	Cleanability	Bioguard paint option	Scratch resistance	
Extra Microperforation Rg 0701 (2)	up to 30	80	0.55(L)	D	0.65	21	10	A2-s2, d0	95	wipeable moist cloth (3)	✓	✓
Microperforation Rd 1522 (2)	up to 30	65	0.70	C	0.70	16	6	A2-s2, d0	95	wipeable moist cloth (3)		✓
Standard Perforation Rg 2516 (2)	up to 30	70	0.75(L)	C	0.80	18	8	A2-s2, d0	95	wipeable moist cloth (3)		✓
Plain / Unperforated (1)	up to 30	85	0.10(L)	Not Classified	0.10	44	19	A1	95	scrubbable	✓	✓
Premium B15	up to 30	depends on perforation	0.65	C	0.60	41	20	A2-s1, d0	95	wipeable moist cloth		✓
Premium OP19	up to 30	depends on perforation	1.00	A	0.90	31	15	A2-s2, d0	95	wipeable moist cloth		✓

(1) RAL 9010 colour, without acoustic inlay. (2) RAL 9010 colour, with black acoustic fleece glued on rear. (3) Wipeable moist cloth for perforated tiles with fleece. Scrubbable for plain tiles or perforated tiles without fleece.

CROSS-SECTION

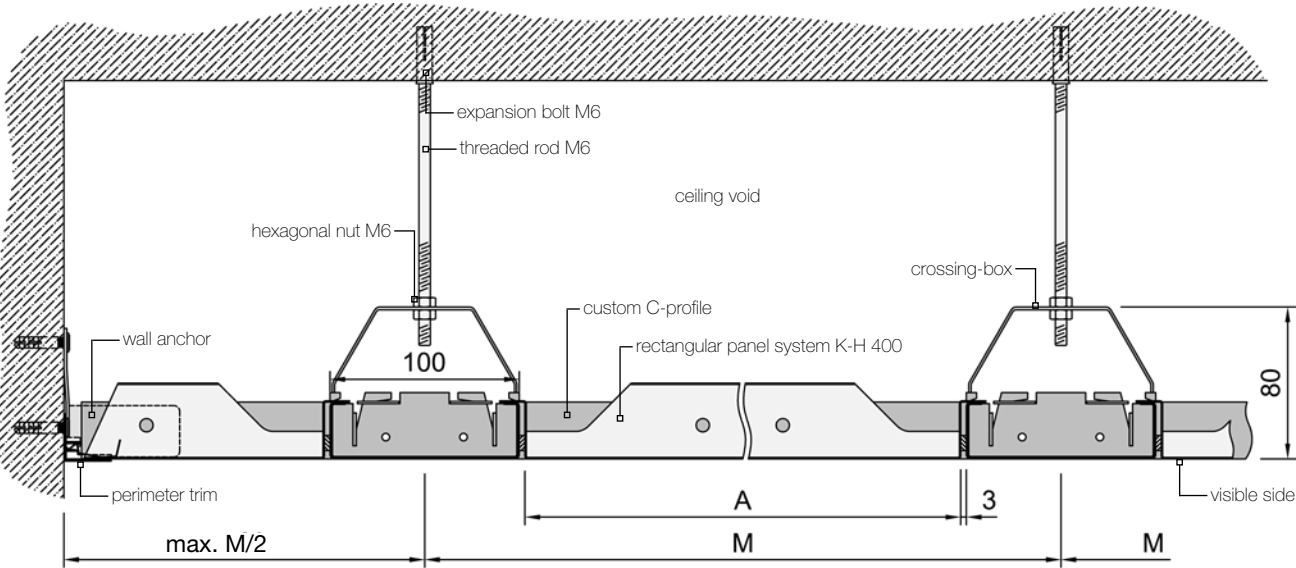


LONGITUDINAL-SECTION

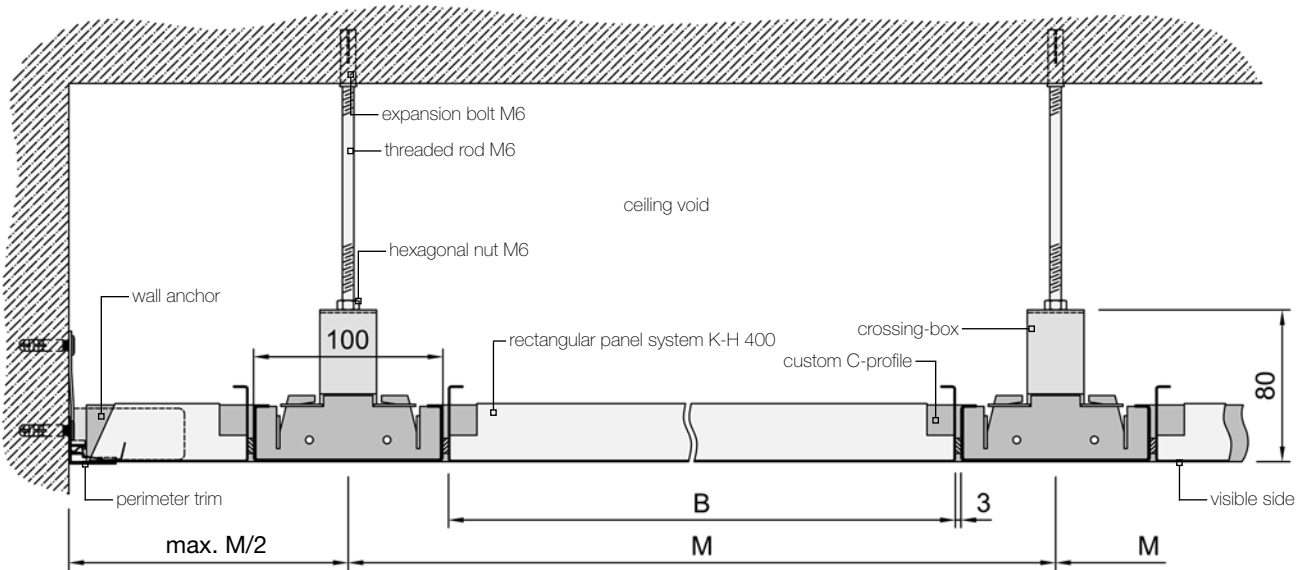


M = module size / A = panel length / B = panel width

Item No.	Designation
BPM 215004	crossing-box 100 x 100 mm
customised	custom C-profile 100 mm
BPM 300144	wall anchor
BPM 311111	expansion bolt M6 x 30 mm
BPM 311099	threaded rod M6 x 1'000 mm
BPM 311103	hexagonal nut M6


Detail A K-H 400 panel

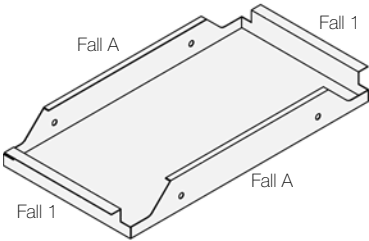


Detail B grid system

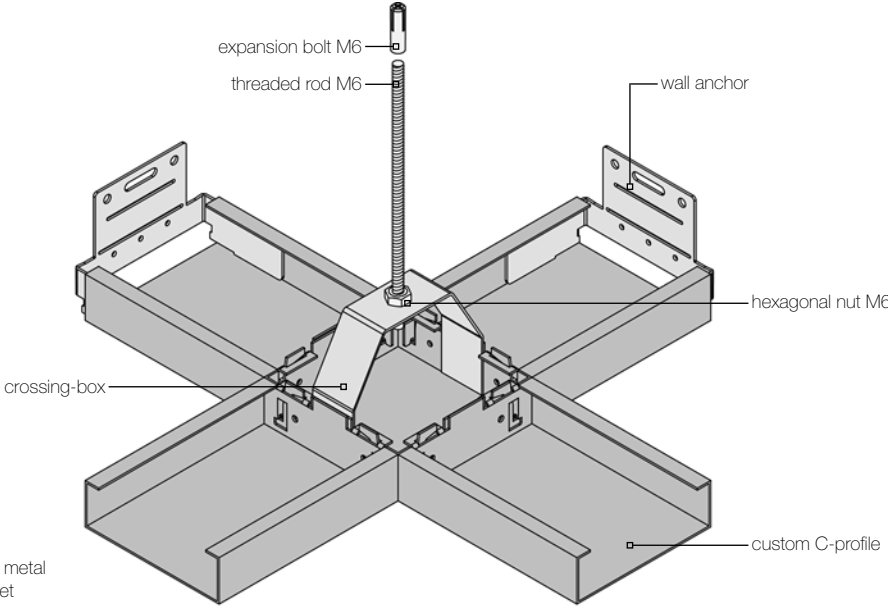


For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet

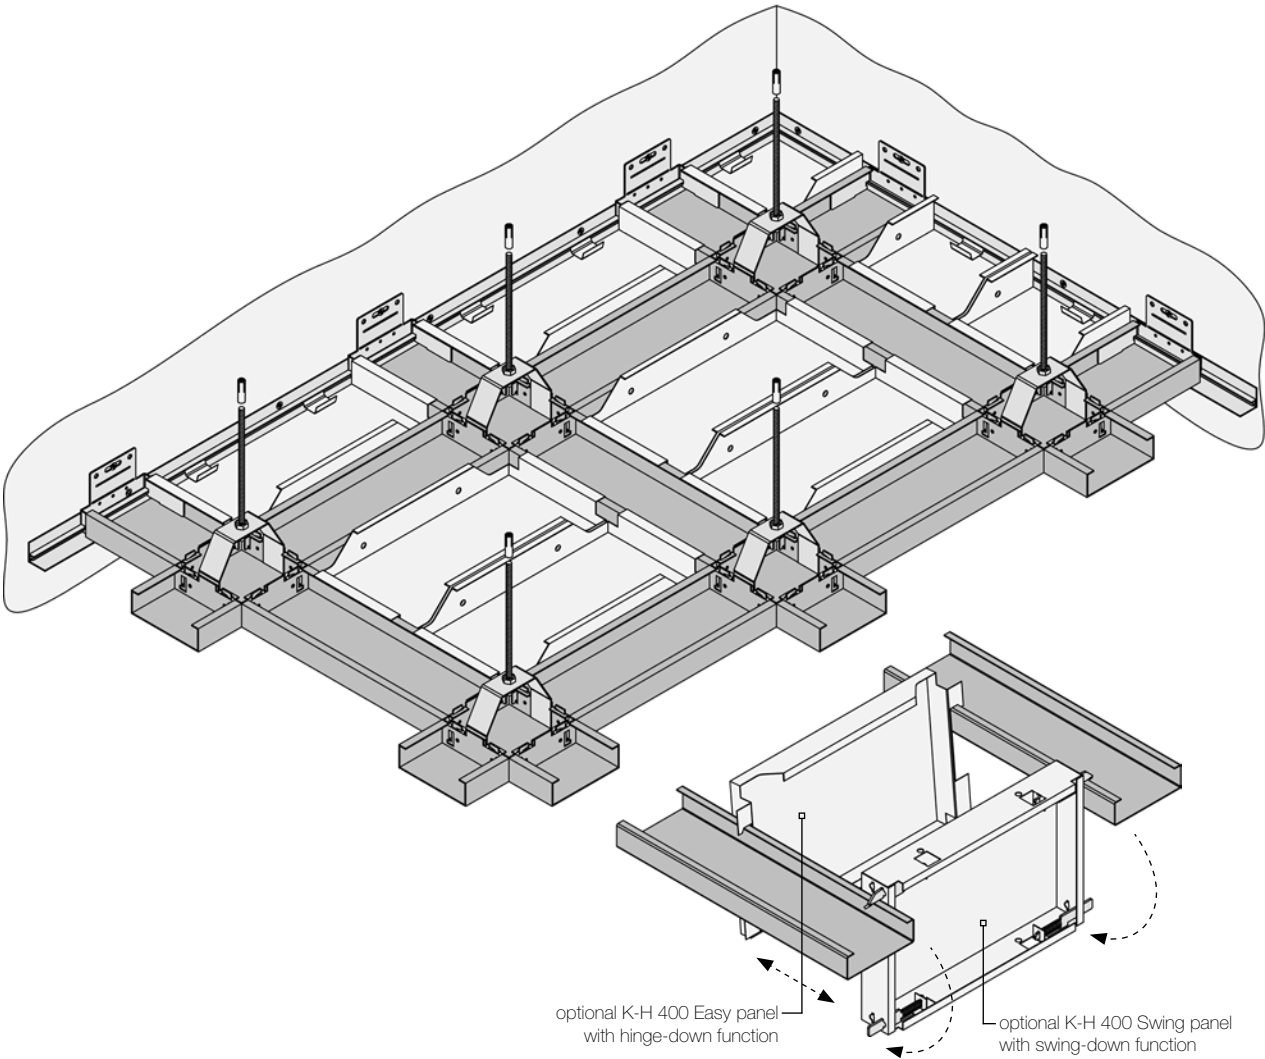


LAYOUT OPTIONS




Module with 1 mega panel




Module with 2 rectangular panels




Module with 2 rectangular panels and light integration




Module with 3 rectangular panels




Module with 4 rectangular panels




Module with 4 square tiles (suspended by a J-bar in the middle)



Module with a diagonal custom C-profile and 2 triangular panels



Module with 4 elements to build up a truncated pyramid, with a centre tile or service integration

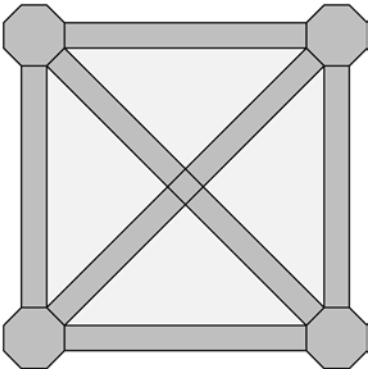

Module with octagonal crossing-boxes and diagonal custom C-profile, with 4 triangular panels

Metal
product

R-H 200 SYSTEM

Rectangular panels / planks

Inspiring Great Spaces™

Armstrong®



BENEFITS

- Versatile system and simple design
- Concealed grid for a monolithic effect
- Good acoustic properties
- Ease of installation (alignment) and fully demountable

- Easy access to the ceiling void
- Maintenance friendly system

APPLICATION AREA

- Suitable for large open plan / circulation areas

PROJECT: The City of St. Gallen (CH)
CONTRACTOR: Phonex AG

R-H 200 SYSTEM

RECTANGULAR PANELS / PLANKS

SPECIFICATION


System	Armstrong ceiling system R-H 200, Hook-On solution with concealed grid, suspension height min. 105 mm
Panel material	galvanised steel sheet panel width up to 400 mm 0.6 mm panel width from 401 mm 0.7 mm (aluminium or other materials on request)
Coating	RAL 9010 pure white post-coated powder painted visible surface, other RAL or NCS colours on request
Execution*	rectangular panel square edged long sides CA / DA (40 - 55 mm) short sides E1 / F4 (30 mm)
Gap solution	3 mm gap, with black gasket on one long and one short side
Acoustic inlay	Black non-woven acoustic fleece as standard. Other options available on request.
Standard modules	1800 x 400 mm 2100 x 400 mm 2400 x 400 mm 2700 x 400 mm 3000 x 400 mm
Configurable dimensions	panel length (A) 600 - 3000 mm panel width (B) 275 - 1350 mm
Grid system	U-profile + J-bar, security bracket optional available, further suspension methods on request

* For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet


Perimeter solution	Range of standards trims in steel and aluminium plus custom bulkheads available.
Service integration	standard round or rectangular cut-outs plus customised options on request.
Special capabilities	- trapezoidal panel solution - curved panel solution - segmented vault or wave ceiling solution - can be combined with other Armstrong products




STANDARD PERFORATION PATTERNS



**Extra Microperforation
Rg 0701**
Hole diameter: 0.7 mm
Open area: 1.5 %



**Microperforation
Rd 1522**
Hole diameter: 1.5 mm
Open area: 22%



**Standard Perforation
Rg 2516**
Hole diameter: 2.5 mm
Open area: 16%

Other perforation patterns available on request.

ACOUSTIC PERFORMANCE

Metal ceiling systems have been tested for their acoustic performance in terms of sound absorption, sound attenuation and sound reduction. These performance values will depend upon the perforation and the acoustic infill. Please contact us for more information on the available factory fitted acoustic options.

THERMAL CONDUCTIVITY

(λ) W/mK
50.0 : Steel
0.04 : Acoustic fleece

HUMIDITY EXPOSURE

Up to 95% RH (for short term exposure).

SERVICES INTEGRATION

Metal panels can be supplied with factory produced cut outs and apertures for the integration of building services equipment.

CLEANING

Dust should be removed from the painted surface by wiping with a clean soft cloth. More stubborn marks should be removed with a mild household detergent in warm water. Excessive use of water should be avoided. The use of abrasive cleaners of the painted surface is not recommended.

COLOUR

Standard colours

RAL 9010	20% gloss
Global White	12% gloss
RAL 9006	30% gloss
RAL 9007	30% gloss



Special colours

Other RAL and NCS colours available on request

QUALITY STANDARD

Armstrong is a certified **EN ISO 9001:2008** Quality Assured Manufacturer. All Armstrong ceiling and grid systems are manufactured to the relevant tolerances and quality standards appropriate to material. Where differences exist between this and any expressed or implied architectural specifications or requirements then Armstrong's manufacturing standards will prevail unless stated otherwise.


ENVIRONMENTAL

Our metal panels have an average of up to 30% recycled content. Our European manufacturing plants are certified to: **ISO 14001:2004 + Cor. 1:2009**
Armstrong is a member of TAIM (Technical Association of Industrial Metal Ceilings).


Sustainability		Acoustics						Safe & Healthy				
Recycled content (%)	Light reflectance (%)	α _w up to	Sound absorption class	NRC up to	Dncw / Dnfw (dB) up to	Rw (dB) up to	Fire reaction	Humidity resistance (%) up to	Cleanability	Bioguard paint option	Scratch resistance	
Extra Microperforation Rg 0701 (2)	up to 30	80	0.55(L)	D	0.65	21	10	A2-s2, d0	95	wipeable moist cloth (3)	✓	✓
Microperforation Rd 1522 (2)	up to 30	65	0.70	C	0.70	16	6	A2-s2, d0	95	wipeable moist cloth (3)		✓
Standard Perforation Rg 2516 (2)	up to 30	70	0.75(L)	C	0.80	18	8	A2-s2, d0	95	wipeable moist cloth (3)		✓
Plain / Unperforated (1)	up to 30	85	0.10(L)	Not Classified	0.10	44	19	A1	95	scrubbable	✓	✓
Premium B15	up to 30	depends on perforation	0.65	C	0.60	47	21	A2-s1, d0	95	wipeable moist cloth		✓
Premium OP19	up to 30	depends on perforation	1.00	A	0.90	31	15	A2-s2, d0	95	wipeable moist cloth		✓

(1) RAL 9010 colour, without acoustic inlay. (2) RAL 9010 colour, with black acoustic fleece glued on rear. (3) Wipeable moist cloth for perforated tiles with fleece. Scrubbable for plain tiles or perforated tiles without fleece.

CROSS-SECTION

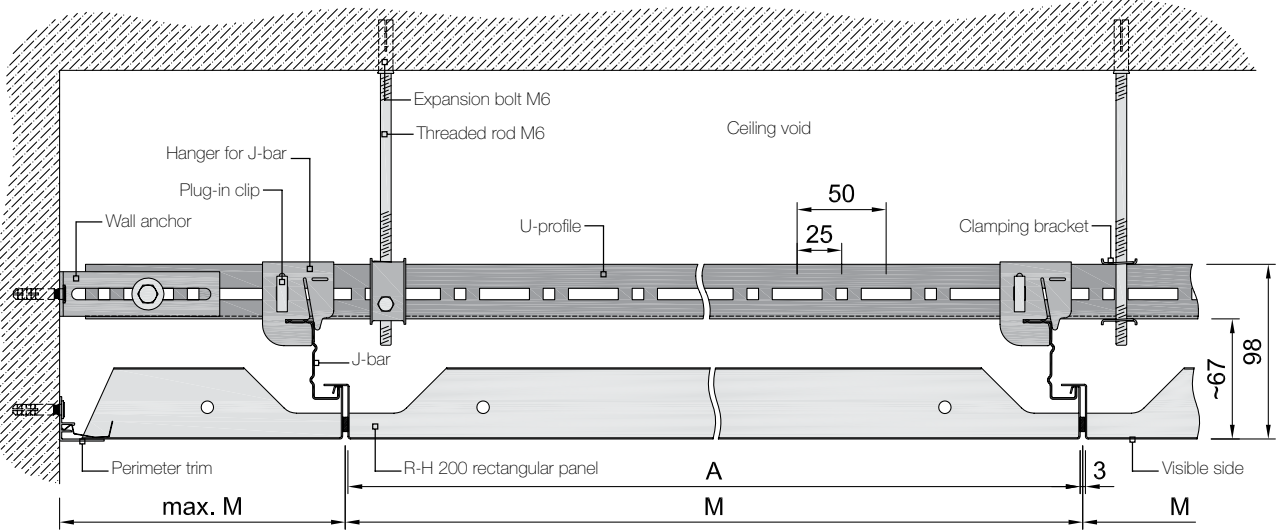

LONGITUDINAL-SECTION

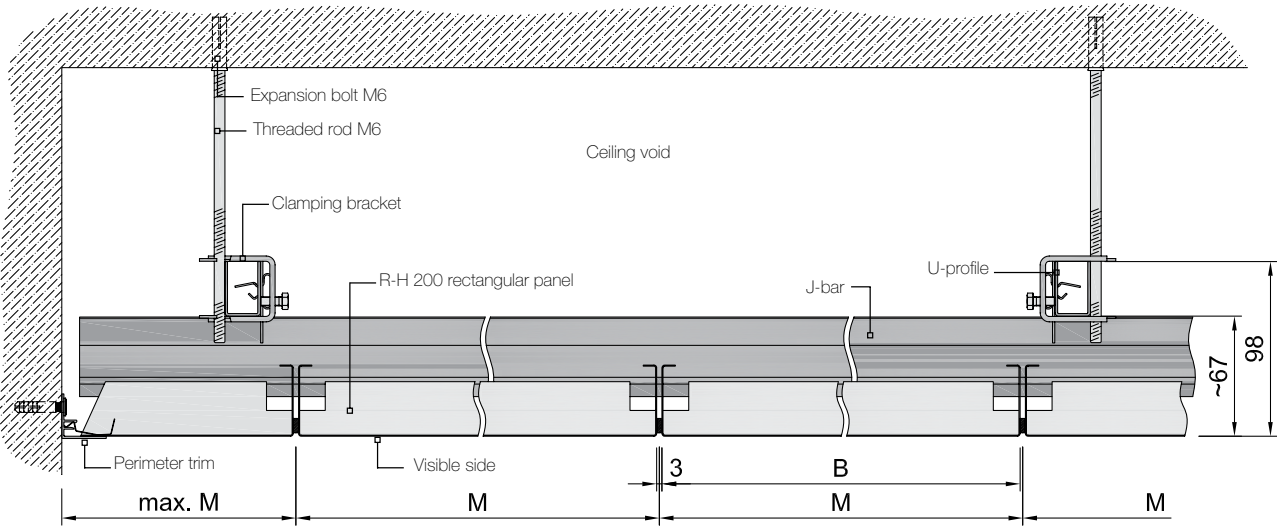


M = module size / A = panel length / B = panel width


Item No.	Designation
BPM 300100	U-profile
BPM 300119	Connector for U-profile
BPM 300120	Plug-in clip
BPM 300140	Wall anchor
BPM 300121	Clamping bracket
BPM 311111	Expansion bolt M6 x 30 mm
BPM 311099	Threaded rod M6 x 1'000 mm

Item No.	Designation
BPM 300026	J-bar
BPM 300343	Connector for J-bar
BPM 300307	Hanger for J-bar
BPM 311303	Hexagonal bolt M6 x 16 mm
BPM 311103	Hexagonal nut M6
BPM 311305	Washer M6 18 x 1.6 mm
BPM 300216	Security bracket
BPM 311046	Extraction tool for R-H 200


Detail A R-H 200 panel

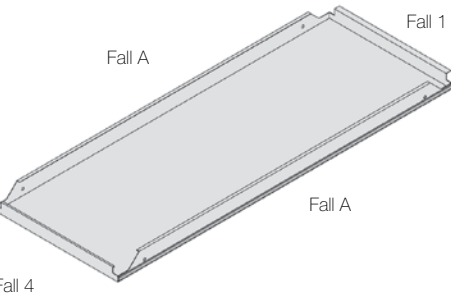



Detail B Security clip option

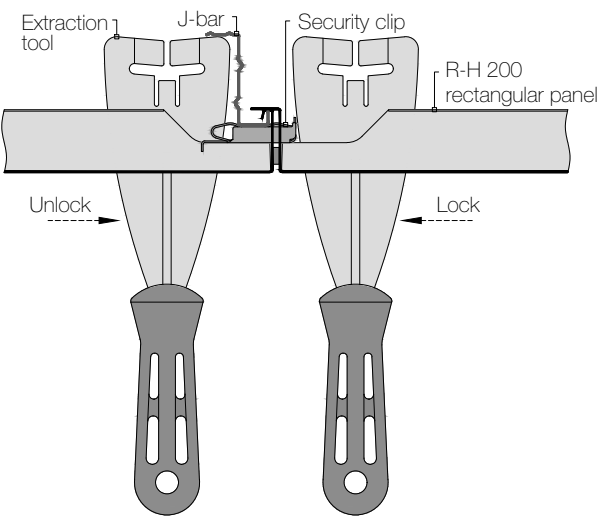

Detail C Grid system

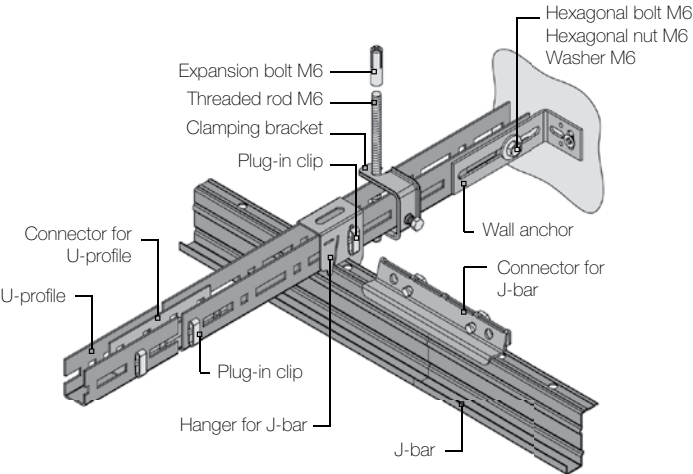

Detail D Suspension methods

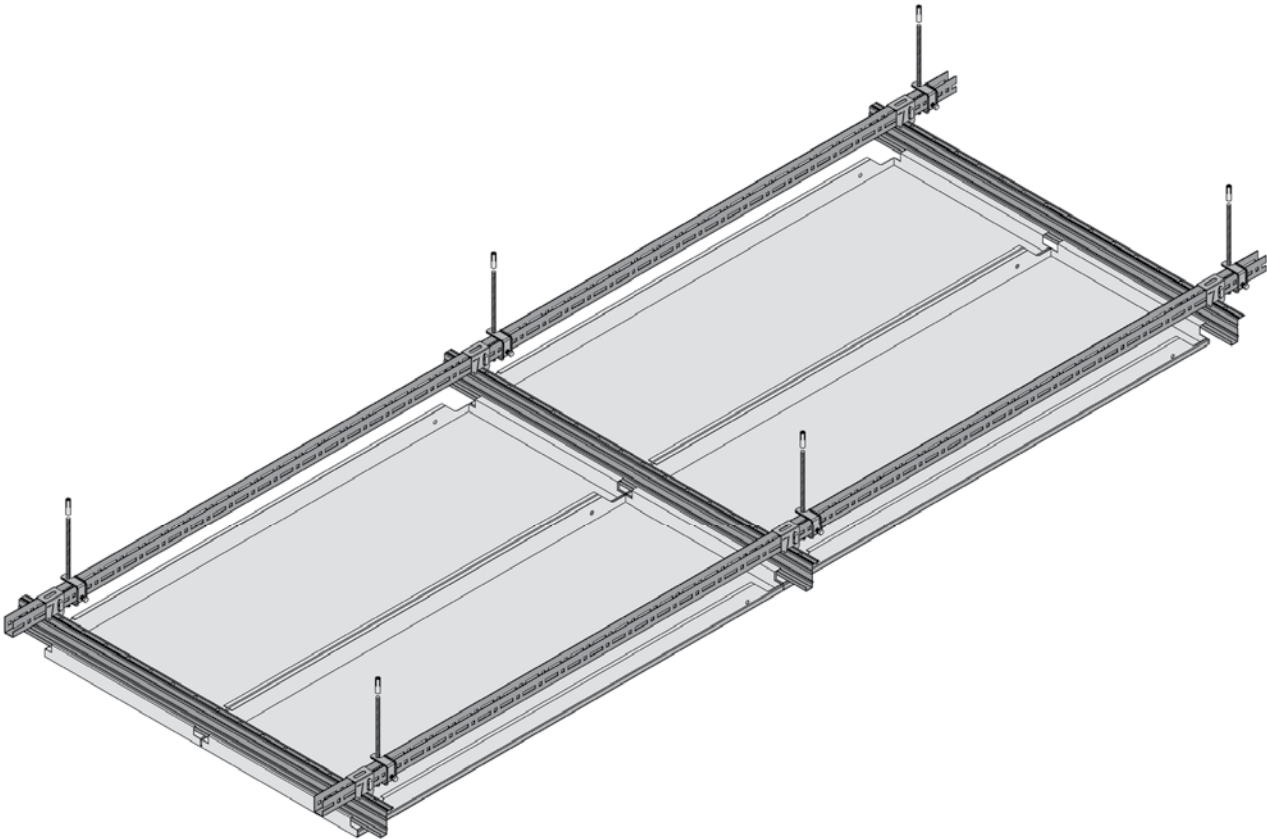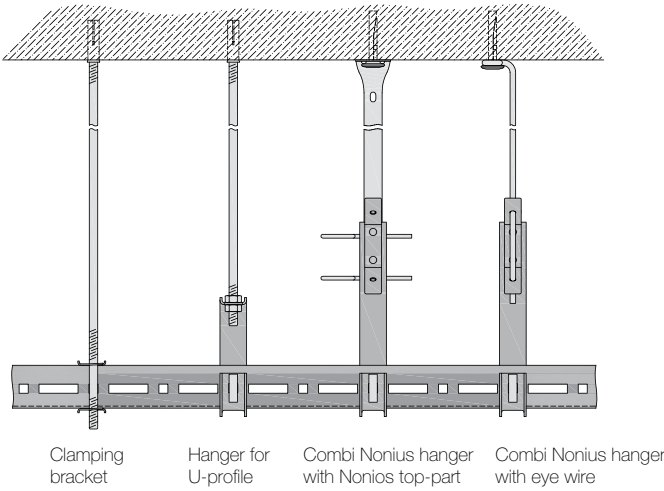

Metal
product

R-H 215 SYSTEM

Rectangular panels / planks

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS



BENEFITS

- Versatile system and simple design
- Concealed grid for a monolithic effect
- Good acoustic properties
- Ease of installation (alignment) and fully demountable
- Easy access to the ceiling void
- Maintenance friendly system

APPLICATION AREA

- Suitable for large open plan / circulation areas

PROJECT: Library in the Teology University of Jan Pawel II (PL) ::::: ARCHITECT: K. Ingarden, J. Ewý Architekci Sp. z o.o.
SOLUTION: R-H 215 Plain with Special Perforations (RAL 9007)

R-H 215 SYSTEM

RECTANGULAR PANELS / PLANKS

SPECIFICATION


System	Armstrong ceiling system R-H 215, Hook-On solution with concealed grid, with optional revision opening Power Swing, suspension height min. 100 mm
Panel material	galvanised steel sheet panel width up to 400 mm 0.6 mm panel width from 401 mm 0.7 mm (aluminium or further materials on request)
Coating	RAL 9010 pure white post-coated powder painted visible surface, other RAL or NCS colours on request
Execution*	rectangular panel square edged long sides CA / DA (40 - 55 mm) short sides E8 / F8 (12 mm)
Gap solution	3 mm gap, with black gasket on one long and one short side
Acoustic inlay	Black non-woven acoustic fleece as standard. Other options available on request.
Standard modules	1800 x 400 mm 2100 x 400 mm 2400 x 400 mm 2700 x 400 mm 3000 x 400 mm
Configurable dimensions	panel length (A) 600 - 3000 mm panel width (B) 275 - 1350 mm
Grid system	GemaGrid® system in combination with H-profile 35, security bracket optional available, further suspension methods on request

* For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet


Perimeter solution	Range of standards trims in steel and aluminium plus custom bulkheads available.
Service integration	standard round or rectangular cut-outs plus customized options on request.
Special capabilities	- trapezoidal panel solution - facettted ceiling solution - can be combined with other Armstrong products




STANDARD PERFORATION PATTERNS



**Extra Microperforation
Rg 0701**
Hole diameter: 0.7 mm
Open area: 1.5 %



**Microperforation
Rd 1522**
Hole diameter: 1.5 mm
Open area: 22%



**Standard Perforation
Rg 2516**
Hole diameter: 2.5 mm
Open area: 16%

Other perforation patterns available on request.

ACOUSTIC PERFORMANCE

Metal ceiling systems have been tested for their acoustic performance of sound absorption. All perforated products can be supplied with a variety of factory fitted acoustic infill options. Please contact us for more information.

THERMAL CONDUCTIVITY

(λ) W/mK
50.0 : Steel
0.04 : Acoustic fleece

HUMIDITY EXPOSURE

Up to 95% RH (for short term exposure).

SERVICES INTEGRATION

Metal panels can be supplied with factory produced cut outs and apertures for the integration of building services equipment.

CLEANING

Dust should be removed from the painted surface by wiping with a clean soft cloth. More stubborn marks should be removed with a mild household detergent in warm water. Excessive use of water should be avoided. The use of abrasive cleaners of the painted surface is not recommended.

COLOUR

Standard colours

RAL 9010	20% gloss
Global White	12% gloss
RAL 9006	30% gloss
RAL 9007	30% gloss



Special colours

Other RAL and NCS colours available on request

QUALITY STANDARD

Armstrong is a certified **EN ISO 9001:2008** Quality Assumed Manufacturer. All Armstrong ceiling and grid systems are manufactured to the relevant tolerances and quality standards appropriate to material. Where differences exist between this and any expressed or implied architectural specificaitons or requirements then Armstrong's manufacturing standards will prevail unless stated otherwise.


ENVIRONMENTAL

Our metal panels have an average of up to 30% recycling content. Our European manufacturing plants are certified to: **ISO 14001:2004 + Cor. 1:2009**
Armstrong is a member of TAIM (Technical Association of Industrial Metal Ceilings).


Sustainability		Acoustics						Safe & Healthy				
Recycled content (%)	Light reflectance (%)	α _w up to	Sound absorption class	NRC up to	Dncw / Dnfw (dB) up to	Rw (dB) up to	Fire reaction	Humidity Resistance (%) up to	Cleanability	Bioguard paint option	Scratch resistance	
Extra Microperforation Rg 0701 (2)	up to 30	80	0.55(L)	D	0.65	21	10	A2-s2, d0	95	wipeable moist cloth (3)	✓	✓
Microperforation Rd 1522 (2)	up to 30	65	0.70	C	0.70	16	6	A2-s2, d0	95	wipeable moist cloth (3)		✓
Standard Perforation Rg 2516 (2)	up to 30	70	0.75(L)	C	0.80	18	8	A2-s2, d0	95	wipeable moist cloth (3)		✓
Plain / Unperforated (1)	up to 30	85	0.10(L)	Not Classified	0.10	44	19	A1	95	scrubbable	✓	✓

(1) RAL 9010 colour, without acoustic inlay. (2) RAL 9010 colour, with black acoustic fleece glued on rear. (3) Wipeable moist cloth for perforated tiles with fleece. Scrubbable for plain tiles or perforated tiles without fleece.

CROSS-SECTION

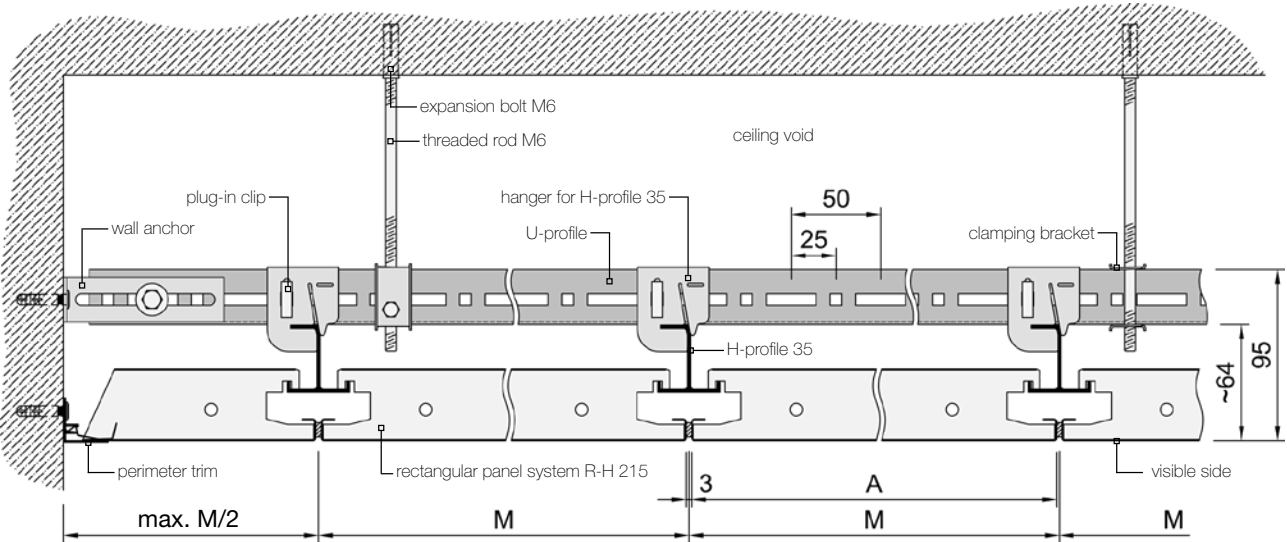

LONGITUDINAL-SECTION

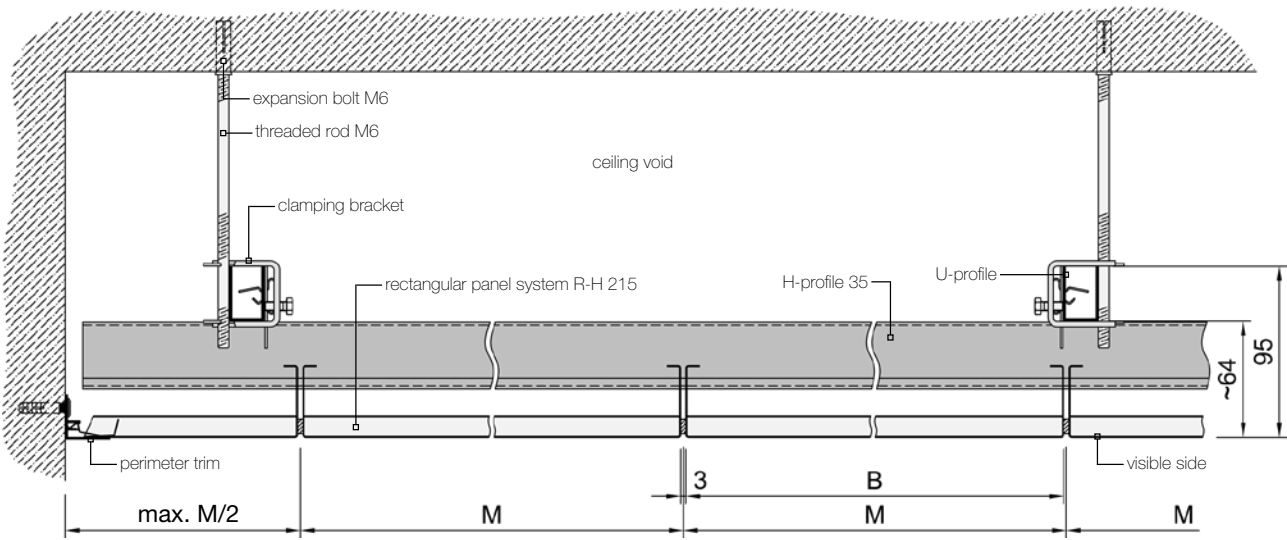


M = module size / A = panel length / B = panel width


Item No.	Designation
BPM 300100	U-profile
BPM 300119	connector for U-profile
BPM 300120	plug-in clip
BPM 300140	wall anchor
BPM 300121	clamping bracket
BPM 311111	expansion bolt M6 x 30 mm
BPM 311099	threaded rod M6 x 1'000 mm

Item No.	Designation
BPM 311400	H-profile 35
BPM 300343	connector for H-profile 35
BPM 300307	hanger for H-profile 35
BPM 311303	hexagonal bolt M6 x 16 mm
BPM 311103	hexagonal nut M6
BPM 311305	washer M6 18 x 1.6 mm
BPM 300216	security bracket


Detail A R-H 215 panel

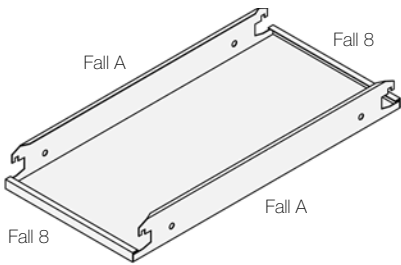


Detail B R-H 215 Power Swing panel

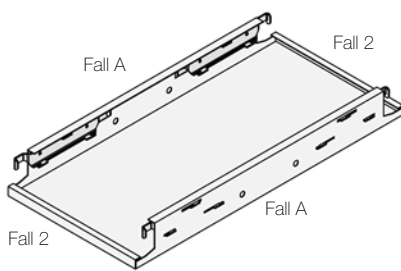


Detail C grid system

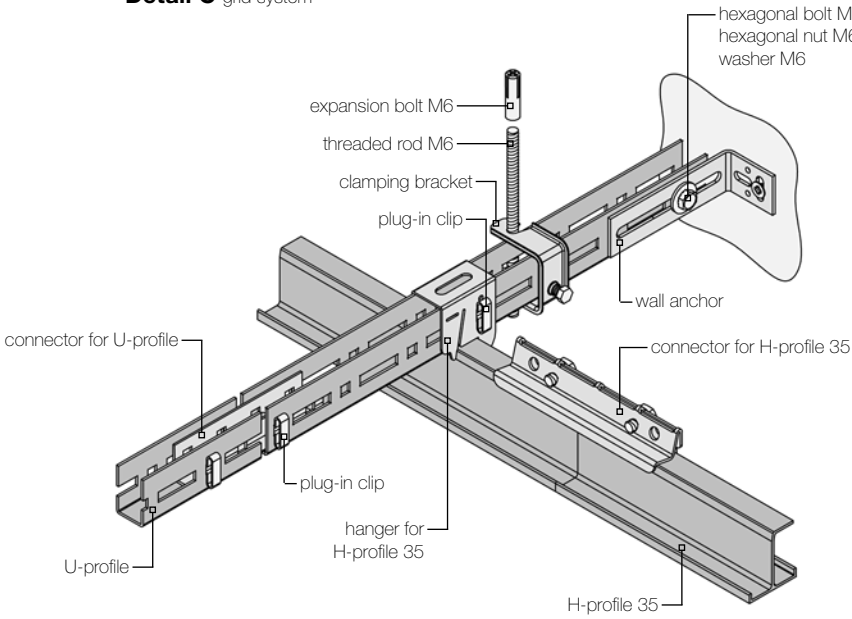


Detail E suspension methods

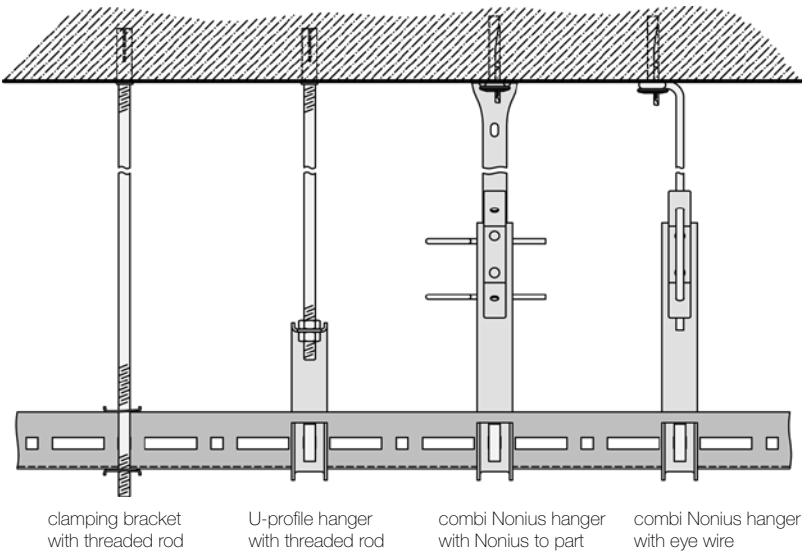

For further information about the edge detail execution of metal tiles, please see the Metal Edge Detail Execution datasheet

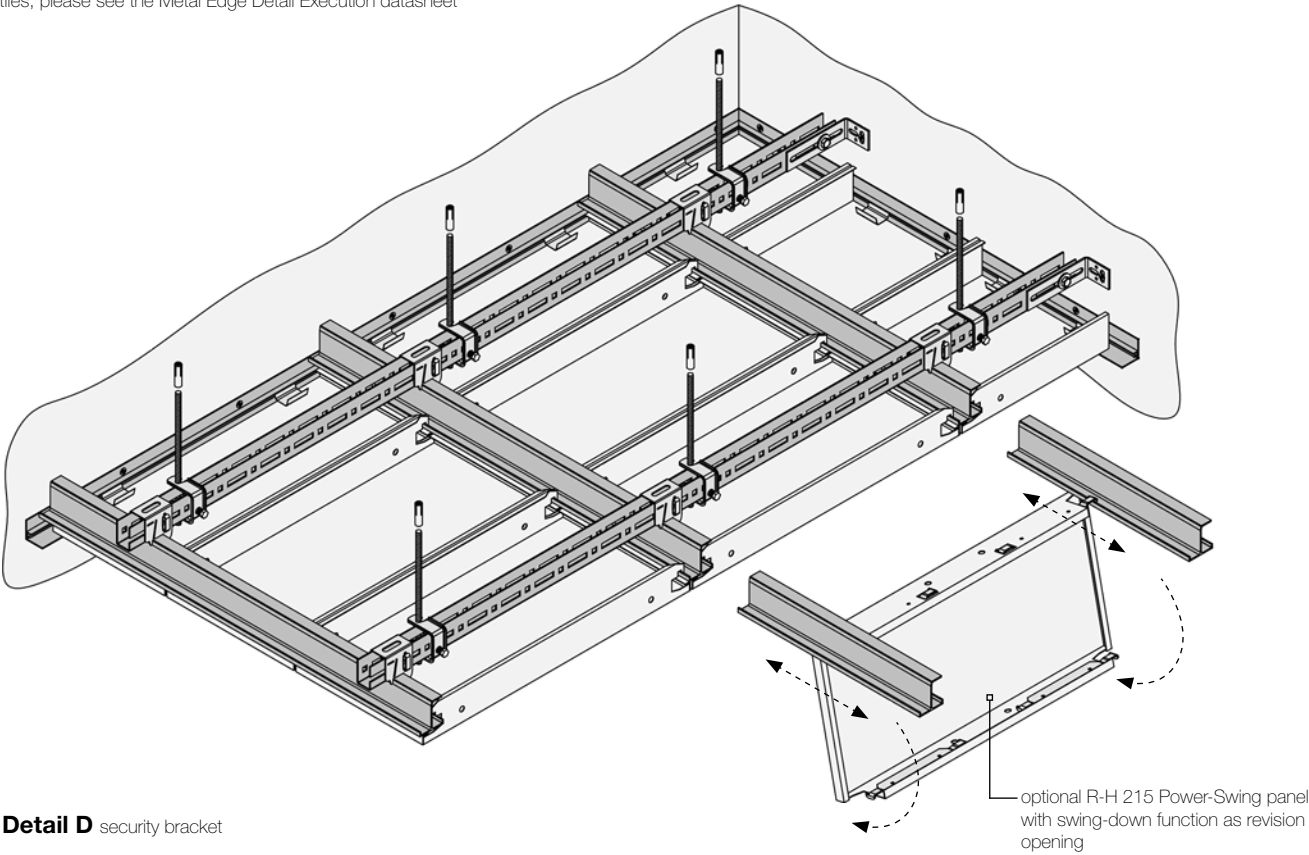

Detail D security bracket

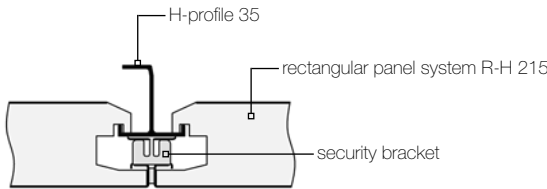

WESTERN EUROPE

Belgium & Luxembourg

Armstrong Building Products B.V.
Postbus 3803
4800 DV Breda
Netherlands
Tel.: +32 02 223 00 72
Fax: +31 (0) 76 521 04 07
e-mail: benelux-info@armstrong.com
www.armstrongplafonds.be

Germany & Switzerland

Armstrong Building Products
Kundenservice
Office Building Quadrium
Claudius Prinsenlaan 126
4818 CP Breda
Netherlands
Tel.: +49 (0) 251 7603 210
Fax: +49 (0) 251 7603 593
e-mail: deutsche-info@armstrong.com
www.armstrongdecken.de
www.armstrongceilings.ch

Firmensitz

Armstrong Building Products GmbH
Robert-Bosch-Str. 10
48153 Münster
Germany

Armstrong Metalldecken AG
Breitfeldstrasse 8
9015 St. Gallen
Switzerland
Tel.: +41 (0) 71 313 63 63
Fax: +41 (0) 71 313 64 00
e-mail: gema@armstrong.com
www.armstrongceilings.ch

Zentralschweiz
Armstrong Metalldecken AG
Büro / Lager Zentralschweiz
Grossweid 9
6026 Rain
Switzerland
Tel.: +41 (0) 41 921 63 63
Fax: +41 (0) 41 921 63 80
e-mail: gema@armstrong.com
www.armstrongceilings.ch

Armstrong Plafonds Métalliques SA
Bureau et Dépôt Suisse Romande
Avenue de Châteline 87
1219 Châteline
Suisse
Tel.: +41 (0) 22 731 60 70
Fax: +41 (0) 22 731 60 74
e-mail: gema@armstrong.com
www.armstrongceilings.ch

Austria

Armstrong Metalldecken GmbH
Bundesstrasse 70
6830 Rankweil
Austria
Tel.: +43 (0) 55 22 34 44-0
Fax: +43 (0) 55 22 34 44-8
e-mail: gema@armstrong-decken.at
www.armstrongdecken.at

Armstrong Metalldecken GmbH
Messendorferstrasse 6
8041 Graz
Austria
Tel.: +43 (0) 316 471 584
Fax: +43 (0) 316 471 584-10
e-mail: gema@armstrong-decken.at
www.armstrongdecken.at

Spain & Portugal

Armstrong Building Products SAS
Immeuble Paryseine
3, allée de la Seine
94854 Ivry-sur-Seine Cedex
France
Phone: +34 91 642 04 99
info-espana@armstrong.com
www.armstrongtechos.es

France

Armstrong Building Products SAS
Bureaux Commerciaux France
Immeuble Paryseine
3 Allée de la Seine
94854 Ivry-sur-Seine
France
Tel.: 0800 41 36 43
Fax: +33 1 45 21 04 11
e-mail: info-France@armstrong.com
www.armstrongplafonds.fr

Siège social
Armstrong Building Products SAS
67 rue de Salins – CS 20089
25302 Pontarlier Cedex
France

Italy & Greece

Armstrong Building Products
Ufficio Commerciale Italia
Immeuble Paryseine
3 Allée de la Seine
94854 Ivry-sur-Seine
France
Tel.: +39 800 118 085
e-mail: info-italia@armstrong.com
www.armstrongsoffitti.it

Netherlands

Armstrong Building Products B.V.
Postbus 3803
4800 DV Breda
Netherlands
Tel.: (+31) 076 523 02 00
Fax: (+31) 076 521 04 07
e-mail: benelux-info@armstrong.com
www.armstrong-plafonds.nl

United Kingdom

Armstrong World Industries Ltd
Building Products Division
Armstrong House
38 Market Square
Uxbridge UB8 1NG
United Kingdom
Tel.: 0800 371 849
Fax: +44 1895 274287
e-mail: sales-support@armstrong.com
www.armstrongceilings.co.uk

Republic of Ireland

Armstrong World Industries Ltd.
108 Greenlea Road
Terenure
Co Dublin 6W
Ireland
Tel.: 1800 409002
Tel.: (+353) 1 499 1701
Fax: (+353) 1 490 7061
e-mail: sales-support@armstrong.com
www.armstrongceilings.ie

CENTRAL EUROPE NORTH

(DK/EE/FIN/IS/LT/LV/N/PL/S)

Armstrong Building Products BV
Sp. z o.o. Oddział w Polsce
ul. Domaniewska 37
02-672 Warszawa
Poland
Tel.: (+48) 22 337 86 10/ 86 11
Fax: (+48) 22 337 86 12
e-mail: service-ce@armstrong.com
Latvia: www.armstrongceilings.com/latvia
Lithuania: www.armstronglubos.lt
Norway: www.armstrongceilings.com/norway
Poland: www.armstrongsufty.pl
Sweden: www.armstrongceilings.com/sweden

CENTRAL EUROPE SOUTH

(AL/BA/BG/CZ/HR/HU/KO/MD/ME/MK/RO/RS/SK/SI)

Armstrong Building Products
Lighthouse building,
Jankovcova 1569/2c,
170 00 Praha 7,
Czech Republic
Tel.: +420 725 477 588
e-mail: service-ce@armstrong.com
Czech Republic: www.armstrongstropnipodhledy.cz
Hungary: www.armstronggalmennyezet.hu
Romania: www.armstrongtavane.ro
Serbia: www.armstrongplafoni.rs
Slovakia: www.armstrong.sk
Slovenia: www.armstrongstropnisistemi.si
www.armstrongceilings.eu

EASTERN EUROPE

CIS

Armstrong Moscow GmbH
Mosfi Imovskaya Street 38A,
Moscow 119285,
Russian Federation
Tel.: +7 (495) 258 5100
Fax: +7 (495) 258 5103
e-mail: info-cis@armstrong.com
Russian Federation:
www.armstrongceilings.ru

MIDDLE EAST / AFRICA / TURKEY

Armstrong World Industries Ltd Africa Middle East Turkey Division

Armstrong House
38 Market Square
Uxbridge UB8 1NG
Tel.: +44 01895 202097
Fax: +44 01895 272928
e-mail: sales-support@armstrong.com
www.armstrong.eu
Israel: www.armstrong.co.il
South Africa: www.armstrongceilings.co.za

Middle East Regional Office, Dubai, UAE & French Speaking Africa

Office No. 2003, 20th Floor
Gold Crest Executive Tower
Jumeirah Lakes Towers
P.O. Box 73831
Dubai, United Arab Emirates
Tel.: +971 4 453 4545
Fax: +971 4 453 4546
info-me@armstrong.com
www.armstrong.ae

Turkey

Armstrong Europa GmbH
Mimar Sinan Mah. Mimar Sinan
Cad. No: 35/2 Cekmekoy
Istanbul
Turkey
Gsm: +90 542 772 49 22
Gsm: +90 544 293 5931
www.armstrongasmatavan.com.tr
etulpar@armstrong.com