



PERLA dB

Inspiring Great Spaces™

Armstrong®

PERLA dB



Recycled Content

Light Reflectance

VOC A+


PERLA dB

	BOARD	TEGULAR	MICROLOOK 90	SL2
	Prelude 24 - XL ² /TLX Prelude 24 Sixty ² - XL ² /TLX	Prelude 24 - XL ² /TLX Prelude 24 Sixty ² - XL ² /TLX	Prelude 15 - XL ² /TL Silhouette 6mm - XL ² Interlude HRC - XL ²	Prelude 24 + Z bar / Prelude 24 Straight Cut Prelude 24 Sixty ² + Z bar / Prelude 24 Straight Cut
Tiles				
600 x 600 x 19 mm	3191 M	3192 M	2095 M	
675 x 675 x 19 mm			2096 M	
Planks				
1500 x 300 x 19 mm				3797 M
1800 x 300 x 19 mm				3798 M
2500 x 300 x 19 mm				3799 M



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
• Tiles								
0.60(H)	0.65	0.30	0.40	0.55	0.70	0.85	0.95	α_p
Sound Absorption Class = C								
• Planks								
0.50(H)	0.50	0.30	0.35	0.40	0.60	0.70	0.80	α_p
Sound Absorption Class = D								

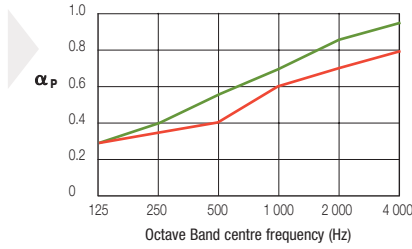

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}
43 dB (Planks)
41 dB (Tiles)



EN ISO 140-3 & EN ISO 717-1

R_w
21 dB (Tiles)



EEA Euroclass A2-s1,d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667 & ISO 8301

$\lambda = 0.067$ W/m K



ISO 14644-1

ISO 5



95 % RH



7.6 kg/m²

Please contact Armstrong Technical Sales Group for further details.

www.armstrong.eu