

CIRRUS

www.armstrong.eu

Armstrong[®]

CIRRUS



CIRRUS


	BOARD	TEGULAR	MICROLOOK BE	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Silhouette XL ² 15 mm Interlude XL ² 15 mm	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
600 x 600 x 15 mm	9619 M	9620 M	9622 M	
625 x 625 x 15 mm	9619 D	9620 D		9621 D



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(H)	0.50	0.35	0.40	0.45	0.55	0.60	0.70	α_p

Sound Absorption Class = D

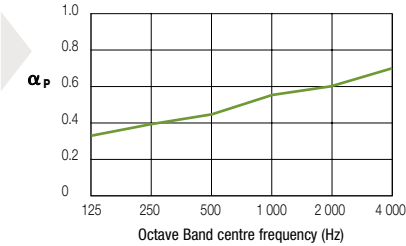

EN 20140-9
& EN 717-1

D_{ncw}	
36 dB	



EEA	Euroclass A2-s1, d0
EN 13501-1	

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



95 % RH



≈ 4.0 kg/m²

Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu

Armstrong®