

SAHARA













Option: SAHARA Unperforated

www.armstrong.eu

Armstrong[®]

SAHARA



SAHARA	BOARD	TEGULAR	MICROLOOK	MICROLOOK BE	VECTOR
					
	Prelude XL ² /TLX 24 mm Prelude Sixty ²	Prelude XL ² /TLX 24 mm Prelude Sixty ²	Prelude XL ² /TL 15 mm Interlude XL ² 15 mm	Prelude XL ² /TL 15 mm Silhouette XL ² 15 mm Interlude XL ² 15 mm	Prelude XL ² 24 mm Prelude Sixty ²
					
SAHARA Perforated					
600 x 600 x 15 mm	2516 M	2518 M	2519 M	2524 M	
625 x 625 x 15 mm	2516 D	2518 D	2519 D		
600 x 600 x 19 mm					3322 M
675 x 675 x 15 mm	2520 M	2521 M		2690 M	
600 x 1200 x 15 mm	2517 M	2522 M	2731 M		
625 x 1250 x 15 mm	2517 D				
300 x 1200 x 15 mm			2730 M		
SAHARA Unperforated					
600 x 600 x 15 mm	2610 M	2612 M	2613 M		
625 x 625 x 15 mm	2610 D				



COLORTONE DUNE: Carrara (CA), Platinum (PN), Blue Mountain (BT).
Please refer to page 69.




EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	
• SAHARA (Board, Tegular, MicroLook, MicroLook BE)	0.60	0.55	0.45	0.40	0.55	0.65	0.65	0.60	α_p
• SAHARA Vector	0.65	0.65	0.45	0.50	0.60	0.70	0.70	0.55	α_p
• SAHARA Unperforated (Board, Tegular, MicroLook)	0.10(L)	0.15	0.30	0.20	0.10	0.10	0.10	0.20	α_p

Sound Absorption Class = C (perforated)

Sound Absorption Class = not classified (unperforated)

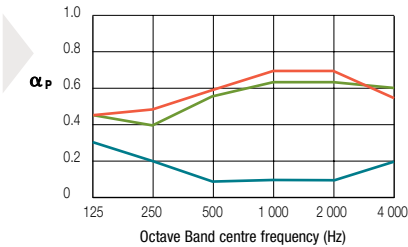

EN ISO 10848-2 & EN ISO 717-1

D_{ntw}
35 dB (SAHARA Vector)
34 dB (SAHARA and SAHARA Unperforated)



EN ISO 140-3 & EN ISO 717-1

R_w
17 dB (15 mm)



EEA	Euroclass	A2-s1, d0
EN 13501-1		

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667 & ISO 8301

$\lambda = 0.06$ W/m K



95 % RH



≈ 3.9 kg/m²

* SAHARA = 40%, SAHARA Vector = 45%. **SAHARA = 84%, SAHARA Unperforated = 85%.

Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu